(19) Canadian Intellectual Property Office

An Agency of Industry Canada

Office de la Propriété Intellectuelle du Canada

Un organisme d'Industrie Canada

(11) **CA 2 490 768** (13) **A1**

(40) 08.01.2004
(43) 08.01.2004

(12)

(21) 2 490 768

(22) 27.06.2003

(51) Int. Cl.⁷: **G02B 6/28**, H04B 10/20, G02B 6/293

(85) 22.12.2004

(86) PCT/US03/020237

(87) WO04/003598

(30) 60/392,306 US 27.06.2002
60/393,209 US 01.07.2002

(71) BROWN UNIVERSITY RESEARCH FOUNDATION, 42 Charlesfield Street Box 1949, PROVIDENCE, XX (US).

(72) LEVNER, DANIEL (CA).
XU, JINGMING (US).
FAY, MARTIN F. (CA).

(74) SIM & MCBURNEY

(54) PROCEDE ET APPAREIL DE DETECTION DE LONGUEURS D'ONDES OPTIQUES MULTIPLES
(54) METHOD AND APPARATUS FOR DETECTING MULTIPLE OPTICAL WAVE LENGTHS

(57) Optical gratings that perform a number of functions at various wavelengths are formed by various methods that preserve spectral information within a wavelength band, the functions including: coupling radiation from one waveguide to another, controllable gratings that operate on different wavelengths in response to external control signals.

(54) Titre : PROCEDE ET APPAREIL DE DETECTION DE LONGUEURS D'ONDES OPTIQUES MULTIPLES
(54) Title: METHOD AND APPARATUS FOR DETECTING MULTIPLE OPTICAL WAVE LENGTHS

(57) Abrégé/Abstract:
Optical gratings that perform a number of functions at various wavelengths are formed by various methods that preserve spectral information within a wavelength band, the functions including: coupling radiation from one waveguide to another, controllable gratings that operate on different wavelengths in response to external control signals.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/003598 A2

(51) International Patent Classification[7]: G02B

(21) International Application Number:
PCT/US2003/020237

(22) International Filing Date: 27 June 2003 (27.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/392,306 27 June 2002 (27.06.2002) US
60/393,209 1 July 2002 (01.07.2002) US

(71) Applicant: BROWN UNIVERSITY RESEARCH
FOUNDATION [US/US]; 42 Charlesfield Street, P.O.
Box 1949, Providence, RI 02912 (US).

(72) Inventors: LEVNER, Daniel; 8 Stonedene Boulevard,
Toronto, Ontario M2R 3C7 (CA). FAY, Martin, F.; 546
Hope Street, Third Floor, Providence, RI 02906 (CA). XU,
Jingming; 310 Grotto Avenue, Providence, RI 02906 (US).

(74) Agent: PETRASKE, Eric, W.; Harrington & Smith, LLP,
4 Research Drive, Shelton, CT 06484-6212 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR DETECTING MULTIPLE OPTICAL WAVE LENGTHS

(57) Abstract: Optical gratings that perform a number of functions at various wavelengths are formed by various methods that preserve spectral information within a wavelength band, the functions including: coupling radiation from one waveguide to another, controllable gratings that operate on different wavelengths in response to external control signals.

Method and Apparatus for Detecting

Multiple Optical Wave Lengths

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to detecting
optical signals and, more particularly, to detecting
10   multiple optical wavelengths with optical supergratings.

2. Prior Art

Gratings are optical devices used to achieve wavelength-
dependent characteristics by means of optical
interference effects. These wavelength-dependent optical
15   characteristics can, for instance, serve to reflect light
of a specific wavelength while transmitting or refracting
light at all other wavelengths. Such characteristics are
useful in a wide range of situations, including the
extraction of individual wavelength-channels in
20   Wavelength Division Multiplexed (WDM) optical
communication systems, or providing wavelength-specific
feedback for tunable or multi-wavelength semiconductor
lasers. Gratings are usually implemented by modulating
(varying) the effective index of refraction of a wave-
25   guiding structure. These changes in index of refraction
cause incident light wavelengths to be reflected or
refracted: in the case of an abrupt interface between two

1

index values, light incident directly on the interface is
reflected according to the well known Fresnel reflection
law.

5   The term "multi-wavelength grating" generally refers to a
grating that is capable of exhibiting optical
characteristics at a number of wavelengths. For example,
a multi-wavelength grating can be a grating that reflects
light at several select wavelengths (which can correspond
10   to specific optical communication channels), yet is
transparent to light at other wavelengths. In some
situations, however, there is a need to set the optical
characteristics for a continuous range of wavelengths,
rather than at specific wavelength values. For example,
15   when trying to compensate for the unevenness of optical
gain profiles in laser cavities and optical amplifiers by
means of an optical grating. However, achieving this
requirement for a continuous range of wavelengths is
difficult to meet with traditional grating technologies.
20

Similarly, a range of optical wavelengths may be used
where many communication channels are encoded into a
single optical cable by utilizing different wavelengths
of light; more commonly known as Wavelength Division
25   Multiplexing (WDM) technology. Periodic gratings are
often used to separate or process these channels.
However, periodic grating technologies process one
wavelength, forcing devices intended to process multiple
wavelengths to employ multiple single-wavelength periodic
30   gratings. This is not an attractive solution because, on
top of the additional losses that each grating creates,
even a single grating occupies a considerable amount of
space by today's standards of integration and

2

miniaturization. It is thus desired to have a single
device capable of processing several wavelengths in a
space-efficient manner.

5   In the realm of semiconductor lasers, the output
    wavelength of semiconductor lasers is largely determined
    by the presence of "feedback elements" around, or inside
    the laser gain section, which act to reflect light at the
    desired wavelength back into the laser. For multi-
10 wavelength operation, multi-wavelength feedback is
    needed. Again, single-wavelength grating technology can
    only address this demand with a cascade of simple
    gratings, leading to the same (if not more notable) loss
    and space problems mentioned above.
15
    One such single-wavelength grating device is a Bragg
    Grating. The Bragg Grating consists of a periodic
    variation in refractive index and acts as a reflector for
    a single wavelength of light related to the periodicity
20 (known as pitch, Λ) of the index pattern; and is
    frequently used in both semiconductor systems and fiber-
    optic systems. In practice, however, the Bragg Grating
    can actually reflect at several wavelengths,
    corresponding to overtones of its fundamental pitch.
25 However, these higher-order wavelengths tend to be at
    quite different spectral regions than the fundamental
    wavelength, thus making the Bragg Grating less than
    useful as a multi-wavelength reflector. Moreover, these
    higher-order wavelengths cannot be tuned independently of
30 one another.

    Other multi-wavelength grating technologies include:
    analog superimposed gratings, Sampled Gratings (SG),

Super-Structure Gratings (SSG) and Binary Supergratings
(BSG).

Analog superimposed gratings are a generalization of the
5   Bragg Grating and are rooted in a principle of
superposition: a grating profile consisting of the sum of
the index profiles of single-wavelength gratings reflects
at all of its constituent wavelengths. Such a grating
relies on an analog index variation, that is, a
10   refractive index that changes continuously along the
grating length (Figure 30). However, it is difficult to
inscribe strong analog gratings using the well known
photorefractive effect, since the change of index under
illumination varies non-linearly, and generally saturates
15   with stronger exposures. Likewise, rendering surface-
relief analog gratings (a typical embodiment for
semiconductors) is made impractical by the difficulty of
reproducibly etching analog features into a surface. The
latter difficulty brought about the introduction of
20   binary gratings, i.e., gratings that rely only on two
refractive index values corresponding to the material
being etched or not etched, illuminated or not
illuminated.

25   Two representations of multi-wavelength binary gratings
are sampled gratings (SG) and superstructure gratings
(SSG). The SG is constructed with alternating sections of
grating and grating-free regions of the waveguide. The
alternating sections produce diffraction spectra having
30   multiple reflectance peaks contained within a (typically)
symmetric envelope. The SG is intrinsically limited in
the flexibility in the location and relative strength of
reflectance peaks, and, because of the large fraction of

grating-free space, is also spatially inefficient. The SG
is therefore particularly unsuitable where a short
grating is required or where waveguide losses are high.

5   With the super-structure grating (SSG), the grating
period is chirped by finely varying the grating pitch,
which corresponds to the length of one tooth-groove
cycle. This can also be thought of as a sequence of
finely tuned phase shifts; common phase profiles include
10 linear and quadratic chirp. Such an implementation in
principle allows arbitrary peak positions and relative
heights, but only at the expense of extremely high
resolution, corresponding to a very small fraction of the
size of the grating teeth themselves.
15

Prior art regarding binary superimposed grating synthesis
is presented in Ivan A. Avrutsky, Dave S. Ellis, Alex
Tager, Hanan Anis, and Jimmy M. Xu, "Design of widely
tunable semiconductor lasers and the concept of Binary
20 Superimposed Gratings (BSG's)," IEEE J. Quantum
Electron., vol. 34, pp. 729-740, 1998.

Other methods in the prior art address the synthesis of
"multi-peak" gratings – i.e., gratings characterized by
25 reflectance at several "peaks", which can be controlled
in their position and strength. In these methods, a
grating engineer begins with a set of sinusoids, each
sinusoid corresponding to a single reflectance peak and
weighted according to that peak's desired relative
30 strength. These peaks are added together (i.e.
superimposed; hence the BSG is known as a superimposed
grating) to produce an "analog profile". This profile is
then digitally quantized by a simple threshold method.

5

For example, if the analog profile value is positive
(above a pre-selected reference) then the corresponding
BSG segment is a high or binary 1 index value; if it is
negative, the corresponding BSG segment is a low or
5   binary zero index value.

However, this approach is inadequate in at least two
areas: firstly, the threshold quantization process
introduces intermodulation, which largely limits the
10   applicability of BSGs synthesized in this manner to
active applications (laser feedback elements and the
like). Secondly, this synthesis procedure is limited to
multi-peak gratings, and offers little or no control over
the individual peak shape. For example, it is entirely
15   incapable of generating flattop channels, as desired by
some communication applications, or of generating the
near-arbitrary reflectance spectra demanded by some gain-
compensation and dispersion-compensation methods.

20   Other methods for BSG synthesis include trial-and-error
methods that are most often computationally difficult and
inefficient.

Therefore, it is desirable to provide a method and
25   apparatus for overcoming the disadvantages noted above in
designing and synthesizing supergratings for detecting
optical wavelengths.

30   BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and other features of the present
invention are explained in the following description,

6

taken in connection with the accompanying drawings,
wherein:

Figure 1 is a schematic of deep-grating BSG;

Figure 2 is a k-space picture of rationale behind

5   baseband exclusion;

Figure 3 is a prototypical diagram of a lateral BSG in a
ridge waveguide;

Figure 4 is a schematic of a prototypical two dimensional
(2D) supergrating;

10   Figure 5 is a schematic of a multi-level one-dimensional
(1D) supergrating implemented with a 2D BSG;

Figure 6 is a schematic of a prototypical three
dimensional (3D) supergrating;

Figures 7a-7d show embodiments of programmable

15   supergratings;

Figure 8 is a schematic of a co-directional asymmetric-
waveguide BSG coupler;

Figure 9 is a schematic of a counter-directional
asymmetric-waveguide BSG coupler;

20   Figure 10 is a schematic of a counter-directional
symmetric-waveguide BSG coupler;

Figure 11 is a schematic of the grid-topology cross bar
switch;

Figure 12 is a schematic of an embodiment of a 4-fiber

25   switch, utilizing 6 switching elements;

Figure 13 illustrates a one-photon method of implementing
a BSG in optical fiber;

Figure 14 illustrates a multi-photon method (two-photon
shown) of implementing a BSG in optical fiber;

30   Figure 15 is a schematic of a demultiplexer employing a
1D BSG;

Figure 16 is a schematic of a demultiplexer employing a
2D BSG;

Figure 17 is a schematic of a static add/drop filter;

Figure 18 is a schematic of a Vernier-tuning dynamic

5   add/drop filter;

Figure 19 is a schematic of a programmable BSG add/drop
filter;

Figures 20a-20c are schematics of embodiments of BSG-
based wavelength stability monitors;

10   Figure 21 is a schematic of a 2-D BSG network monitor;

Figure 22 is a schematic of a BSG dynamic WDM equalizer;

Figure 23 is a schematic of a gain-flattened optical
amplifier;

Figure 24a-24b are schematics of lambda router

15   embodiments;

Figures 25a-25d are schematics of embodiments of BSG
dispersion-slope compensators;

Figures 26a-26b are schematics of tunable dispersion
compensators;

20   Figures 27a-27c are schematics of a variable-feedback
supergrating laser;

Figure 28 is a schematic of beam combiners, in coupled-
waveguide and 2D BSG embodiments;

Figure 29a is a schematic of a BSG-based isolator;

25   Figures 29b-29c are schematics of 4-port coupled-
waveguide circulators;

Figure 30 is an analog index profile from a plot of
refractive index change delta-n (Δn) versus distance (x);

Figure 31 shows a BSG index profile of Δn versus distance

30   x and the corresponding surface-relief implementation;

Figure 32 is a block diagram showing a standard topology
for Delta-Sigma modulation;

Figure 33 illustrates a synthesis technique for a BSG
using induced-symmetry;

Figure 34 illustrates a synthesis technique for a BSG
using super-Nyquist synthesis; and

5   Figure 35 is a flow chart showing method steps of one
embodiment of the present invention for synthesizing a
BSG.

Figures 36a and 36b illustrate a simplified example of a
demultiplexer comared with discrete components.

10

Figures 37 - 45 illustrate embodiments that employ a
pattern of pixels that provides a photonic band gap
structure

15

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Although the present invention will be described with
reference to the embodiments shown in the drawings, it
should be understood that the present invention can be
20   embodied in many alternate forms of embodiments, and it
is not intended that this invention is limited only to
the embodiments shown.

For the purposes of this invention, gratings are
considered to be optical devices used to achieve
25   wavelength-dependent characteristics by means of optical
interference effects.

Starting with Binary Supergratings (BSG), it will be
appreciated that there are two main properties that
30   differentiate the BSG from other grating technologies.
The first is that the BSG relies on a discrete number of

refractive index levels. This number is historically 2
and hence the BSG is known as a binary grating. For the
sake of clarity and illustration this description will
focus on the binary embodiment of the present invention,
5   however, it will be appreciated that in alternate
embodiments any suitable number of discrete levels of
refractive index may be used. For convenience in the
claims, the term supergrating will be used to refer to
gratings with two or more values of index of refraction,
10 unless specifically stated. The second defining property
of the BSG is that the grating resembles a sampled
structure characterized by a sample length. This refers
to the fact that transitions between the grating's index
levels cannot occur at arbitrary positions but, rather,
15 occur at multiples of the sample length. The BSG is thus
similar in definition to a digital signal pattern – i.e.,
a discrete sampled waveform. Thus, the BSG can be
described by a series of (often binary) digits,
indicating the refractive index setting at each sample
20 point (see Figure 31).

Referring now to Figure 35, BSG design involves several
key choices. Step 351 selects the refractive index levels
for the device, as determined from material parameters
25 and lithographic or photoinscription constraints. Step
352 then determines the desired sample length,
considering the desired wavelength range for the grating
and the available lithographic resolution. Step 353 sets
a total device length for the grating, limited by the
30 available physical space and the technological
limitations of the inscribing process. It will be
appreciated that the methods described herein are for
determining grating patterns for surface-relief gratings;

however, in alternate embodiments the methods may be
readily adapted to fiber grating patterns, or to
programmable implementations. The next step 354 converts
the desired grating's diffraction characteristics to the

5   Fourier domain using a Fourier approximation. These
diffraction characteristics can be reflective,
transmissive, co- or counter-directional coupling, or
scattering in character, or any combination thereof; it
will be appreciated that "reflectance" and "reflection"

10   can be replaced by "cross-transmittance" and "cross-
transmission" throughout this document. Guided by the
Fourier approximation, the designer can initially design
the grating by its Fourier spectrum. As will be shown
below, this step can also implement feedback to account

15   for various inaccuracies of the approximation in order to
improve the final result. Alternatively, any method for
the design of an analog refractive index profile to
achieve the desired diffractive characteristics is
suitable, and many are known in the art.

20

The next step 355 performs a quantization of the analog
index profile. Delta-Sigma modulation is one such
quantization technique that can be used and can be
efficiently implemented. It will be appreciated that in

25   alternate embodiments any suitable quantization technique
that conserves Fourier information within a spectral band
may be used. Methods of synthesis and resultant gratings
that use a threshold quantization technique such as that
shown in the cited reference by Avrutsky, et al., which

30   does not conserve Fourier information within a spectral
band are disfavored, but may be useful in some
circumstances. In the case of two dimensional or three
dimensional radiation processing, where radiation

traveling in two or three dimensions is significant, and
a pixel array extending in two or three dimensions is
significant, any quantization method may be used to
design an apparatus that falls within the definition.

5

The next step 356 determines the BSG's actual diffractive
characteristics using an exact technique such as one
known as the transfer matrix method. This calculation
determines residual errors of the Fourier approximation,
10   or other synthesis method used, and quantifies an error
that can be taken back into the Fourier domain and added
to the result of the step 353 if step 357 determines that
the error exceeds a predetermined threshold. This process
can be repeated as necessary, although one repetition is
15   often sufficient. It will be appreciated that any
suitable technique for determining error between the
desired diffractive characteristics and actual
diffractive characteristics may be used.

20   Referring now to each of the above steps in more detail;
in step 353, the Fourier approximation is a mathematical
relation that relates a grating's diffraction
characteristics (which can be reflective, transmissive,
or scattering in character, or any combination thereof),
25   to the structure of its index profile. In other words,
single-wavelength gratings have reflectance spectra
characterized precisely by their periodic structure, and
simple superimposed gratings have reflectance spectra
characterized by their wavelength or reflectance spectra
30   components. Therefore, the diffraction spectrum of a
grating can be related to the Fourier transform of its
structure – the Fourier transform being the standard

method for evaluating the "frequency content" or
"wavelength content" of a waveform.

Thus, it will be appreciated that the invention
5   advantageously uses a Fourier approximation to provide a
means (the inverse Fourier transform) for generating an
analog refractive index profile from the desired
reflectance specifications.
It will also be appreciated that the step of quantizing
10 the analog index profile (step 355) can be performed
regardless of how the analog profile was determined. In
other words, the analog profile need not have been
obtained using Fourier-based methods.

15 The following examples illustrate Fourier Approximation
for BSG synthesis:

Synthesis Of Simple Peaks

20 In some situations, such as with laser feedback elements,
the BSG is desired to reflect light at a given set of
wavelengths, and to do so with the highest wavelength
selectivity possible. That is, the specification is for
simple peaks with minimal channel width. Such peaks can
25 be derived from the superposition of sinusoidal profiles:

$$\sum_i a_i \cos\left(\omega_i x + \phi_i\right)$$

where a_i, ω_i, and ϕ_i are the amplitude, spatial frequency
and phase of the i^{th} peak respectively, and x is the
30 position along the grating's length. Most situations
dictate the amplitude coefficients. However, many do not
require anything specific of the phase.

13

CA 02490768 2004-12-22

In general, component phases should be selected such that
they minimize the maximum height of the superposition
(which consequently flattens the overall envelope), given
5   the component amplitudes. The use of phase information to
produce a flat envelope can greatly increase the
efficiency of the grating. This illustrates a general
principle of BSG design: in most cases, the analog index
profile (before quantization) should preferably have an
10 envelope that is as flat as possible. This is desirable
because a flat envelope represents an even distribution
of grating strength, and makes more efficient use of the
available index modulation.

15 The phase optimization step in accordance with this
invention facilitates large increases in a BSG's
reflective efficiency. It will be appreciated that
increasing the number of reflective peaks produces a sub-
linear increase in the required index modulation. That
20 is, in order to double the number of peaks, but maintain
the same peak reflectance, the index step does not need
to be doubled.

Synthesis Of Bandpass Channels
25

A grating is often required to separate or select
wavelength division multiplexed optical communication
channels. These channels are described by their
wavelength (position) and their bandwidth (width).
30 Gratings are also typically accompanied by specifications
of the strength of the reflection and the spectral
flatness of the channel. Such bandpass filter design is
commonly encountered in FIR filter theory, and thus many

14

approaches to its solution exist. The technique presented
here is based on the method of windowing.

The main principle in the synthesis of structured grating
5   spectra, such as the bandpass filter, is the use of
analytically determined solutions to an approximated
design problem: certain filter shapes, such as the flat-
top filter, are known to correspond to certain
mathematical functions. For example, it is known that the
10 sinc function with the form:

$$\frac{\delta\omega}{\pi}\operatorname{sinc}(\delta\omega\ i)=\frac{\sin(\delta\omega\ i)}{\pi i}$$

where i is the BSG segment number, corresponds to an
ideal lowpass filter of width $\delta\omega$. This filter can be
15 converted into a bandpass filter centered about the
frequency ω_c by multiplying it with an appropriate
sinusoid, resulting in the filter:

$$\frac{\Delta\omega}{\pi}\cos(\omega_c i)\operatorname{sinc}\left(\frac{\Delta\omega}{2}i\right)$$

where the peak is centered about ω_c and has a width of
20 $\Delta\omega$.

Unfortunately, this filter, characterized by an abrupt
transition from the passband to the stopband, requires an
infinite length for its implementation. Simply cropping
25 the filter to the desired length produces undesirable
oscillatory features known as Gibbs phenomena. This is a
common issue in FIR design, and one approach to its
solution is the method of windowing.

The method of windowing views cropping as a
multiplication by a window function that is zero in the
cropped regions. Theory views the cropping operation as
multiplication by a "rectangular window" which equals 1
5   within the region to be kept, and 0 outside in the
sections to be cropped. The theory argues that this
rectangular window is responsible for the Gibbs
phenomena.

10   Window functions that can be used for cropping generally
make the bandpass filter non-ideal by producing a finite
"transition width" between the passband and the stopband,
in contrast to the ideal filter, which requires no width
for the transition. However, FIR filter theory suggests
15   several acceptable, albeit non-ideal, window functions.

One such window function is the Kaiser window – a window
function conceived with the ideal lowpass (and thus
bandpass) filter in mind, and which allows the designer
20   to customize the transition characteristics through a
parameter β. The Kaiser window is thus suitable for BSG
synthesis and provides the added flexibility of
controlling the shape and sharpness of the reflectance
channels. However, this is only one of many FIR
25   techniques that can be used to achieve this result, and
BSG synthesis by Fourier methods is not restricted to
this particular method.

It will be appreciated that the analog profile
30   corresponding to a flattop channel makes most use of the
center of the grating. As with the multi-peak case, this
situation is undesirable as it makes inefficient use of
grating resources away from the center. A convenient

16

solution to this problem is to stagger the waveforms
associated with individual channels when superimposing
them. Together with a phase-optimization technique such
as that used for the multi-peak grating, this procedure
5   can enable very efficient use of the grating's resources.

In some embodiments the reflectance specifications do not
correspond to particular elementary shapes such as band
pass channels or peaks. Gain compensation profiles for
10 optical amplifiers and dispersion-compensation gratings
fall into this category. In these embodiments, gratings
may be synthesized using the discrete Fourier transform
(DFT).

15 The discrete Fourier transforms and the related fast
Fourier transform (FFT) are versions of the Fourier
transform that operate on a finite number of sampled
points. Being related to the regular Fourier transform,
the Fourier approximation and its implications on BSG
20 synthesis carry over to the DFT. A DFT operating on a set
of l real-valued points returns a set of l/2 independent
frequency components. Thus, a desired grating with l
segments may be assigned reflectance values at l/2
wavelengths, but not between wavelengths.
25

An example of BSG synthesis using the DFT is carried out
as follows:

The frequency-domain specifications are inserted into an
30 array of length l, the intended device length (in terms
of number of samples), in a manner suitable for the
inverse-DFT operation. This can be done by "sampling" the
continuous version of the Fourier-domain specifications

at certain points, or, alternatively, by "drawing" the
specification directly in the form suitable for the DFT.
The inverse-DFT of the array is then determined. Various
known forms of "smoothing" can be applied to the
5   resulting waveform in order to reduce oscillatory
features between the frequency samples.

Once the analog index profile has been synthesized, it
may require several modifications. One such modification
10   is filtering by a discrete-sum filter. Another
modification is that the waveform should be scaled to a
level appropriate to the upcoming Delta-Sigma modulation
stage. For example, this can be accomplished by rescaling
the waveform to have an amplitude of 1.
15

Quantizing Or Delta-Sigma Modulation (DSM)

The Fourier domain synthesis presented up to now produces
an analog grating profile. However, the BSG requires a
20   discrete profile utilizing only a small number (usually
two) of index values. It will be appreciated that in
alternate embodiments any suitable number of discrete
values can be used, such as for example, an Octal Super
Grating (OSG). One technique for the quantization (i.e.,
25   discrete rendering) of the grating profile is Delta-Sigma
modulation. However, any suitable quantization techniques
can be used.

A preferable requirement for the quantization of the
30   analog profile by Fourier methods is that it conserves
spectral information in the frequency band of importance.
Delta-Sigma modulation, for example, is designed to
"filter out" quantization noise from a given frequency

18

band, leaving the spectral information in that band
mostly undisturbed. Other quantization methods can also
be applied, with improvements, such as an accounting for
grating effects that are not evident in the frequency

5   domain. In any case, the selected quantization method
preferably conserves small-amplitude spectral features in
the band of importance, as required by the Fourier
approximation, which becomes exact in the small-amplitude
domain.

10

It will be appreciated that the method of BSG synthesis
by Fourier techniques and the following quantization
presented here are not restricted to Delta-Sigma
quantization.

15

Referring to Figure 32, there is shown a DSM feedback
process 320 that improves quantization after a loop
filter 322 by making use of the measured quantization
error 321. That is, DSM quantizes its input using a

20   threshold in unit 323, but keeps track of any important
information that is lost by the quantization in unit 323
and feeds this information back into its input in filter
322. It will be appreciated that in alternate
embodiments any suitable digital quantizer can be used.

25

Error Feedback and Iteration

Once the Fourier grating reflectance spectra has been
quantized, the synthesis is almost complete. The

30   grating's performance can be evaluated using a standard
test such as the transfer matrix method to determine
synthesis error. Synthesis error refers to the difference
between the desired reflectance spectrum and the spectrum

19

measured by the transfer matrix method. In one
embodiment, the error may be evaluated and used to offset
the design specifications by subtracting the error from
the grating's frequency-domain specifications. The new

5   specifications can then be used to repeat the synthesis
process and generate an improved grating. In an alternate
embodiment, the error, which is measured in the frequency
domain, can be appropriately transformed into the spatial
domain and added to the analog grating profile (the

10 grating before quantization). This latter form is a
general and powerful technique that can be utilized
independently of the synthesis method used in the
frequency domain. The error feedback process can be
repeated as desired, but a single iteration is often

15 sufficient. The convergence of the feedback process for
small-amplitude frequency regions is guaranteed by the
Fourier approximation described above.

It will be appreciated that the present invention

20 advantageously allows a designer to compare error
feedback correction with grating correction techniques in
order to correct for distortions in the diffraction-
characteristics domain. For example, certain peaks may
have characteristic shapes to which they distort in the

25 reflectance domain, for which either the above described
error feedback may correct. The present invention allows
the designer to weigh the advantages of error feedback as
compared with application of grating resources.

30 Alternate Embodiments of BSG Synthesis

Induced-Symmetry Synthesis

Referring to Figure 33, an elementary property of sampled
signals is that their Fourier spectrum displays a
symmetry about integer multiples of a characteristic

5   frequency known as the Nyquist frequency. In certain
applications, such as filters with large numbers of
identical peaks, a similar symmetry exists in the
reflectance specification. The principle of Induced-
Symmetry Synthesis is that the symmetry of the

10   reflectance specifications can be reproduced by the
symmetry about the Nyquist frequency, such that the
grating's resources need only be used to create one half
of the spectral features.

15   A good example for this method is the synthesis of a
filter with ten equally spaced reflectance peaks. Using
the principle of Induced-Symmetry Synthesis, the designer
can choose a sampling length that places the Nyquist
frequency precisely in the middle of the ten peaks, that

20   is, on the line of symmetry of the specifications. The
designer can then proceed to synthesize a grating for the
five lower peaks. The upper five peaks appear
automatically due to the Frequency-domain symmetry.

25   Super-Nyquist Synthesis

Often the required resolution for grating inscription
exceeds the available resolution. For example, when
designing a BSG for the 1550 nm wavelength range in

30   Gallium-Arsenide (n = 3.2), it is convenient to place the
Nyquist rate at 1550 nm (to make use of Induced-Symmetry
Synthesis, for example), which corresponds to a sample
length of about 120 nm. This feature size is too small

21

for optical photolithography, and requires the use of the
more expensive electron-beam lithography.

However, Nyquist states that the frequency content above
5   the Nyquist limit consists of repeated copies, known as
images, of the spectral information below the Nyquist
limit. Thus, grating features above the Nyquist rate
(Super-Nyquist) may be generated by synthesizing their
grating image that are found below the Nyquist limit.
10

In this manner, Super-Nyquist Synthesis is useful, for
example, for reducing the resolution required for the
1550 nm Gallium-Arsenide grating discussed above.
Choosing "third order" synthesis, the designer can select
15   the sample length such that the 1550 nm region
corresponds to three times the Nyquist frequency, as
indicated in Figure 34. The designer can then shift the
Fourier domain grating characteristics by integer
multiples of the sampling rate (twice the Nyquist
20   frequency), such that they are in the "baseband", below
the Nyquist frequency. A grating synthesized for these
shifted characteristics displays grating characteristics
where intended, just below three times the Nyquist
frequency, due to the phenomenon of imaging. Furthermore,
25   the sample length for this new grating is 360nm, which is
more appropriate for optical lithography. It will be
appreciated that applying Super-Nyquist Synthesis
advantageously reduces the resolution requirements.

30   Super Grating Applications
Supergrating scattering reduction

22

Referring to Figure 1 there is shown a schematic of a
deep-grating BSG 14 formed in upper cladding 13 that
combines with core 12 and lower cladding 11 to form the
structure. A concern in supergrating design is scattering
5 losses due to radiative cladding modes, arising from low
spatial-frequency components in the grating. This
scattering arises from an incomplete enforcement of
phase-matching conditions in the direction normal to the
grating, and is more prevalent with shallow gratings.

10 Deeper etched features of the present invention reduce
this scattering by occupying a greater distance in the
normal direction, which from the well known Huygens
principle and Fourier considerations, leads to a more
robust phase-matching requirement in the normal
15 dimension; thereby reducing (unwanted) scattering
efficiency. More quantitatively, grating features should
ideally be deep-toothed to a depth exceeding the material
wavelength in the cladding ($\lambda_{mat} = \lambda_0/n_{clad}$), and the decay
constant of the modal tail should be less than $1/\lambda_{mat}$ in
20 the grating region (alternatively, the BSG can be
implemented in the core region 12 at the mode's center,
in which case the core 12 should be wider than λ_{mat}; or in
such a way that the index perturbation spans the entire
modal profile). This ensures relatively even
25 contributions from the normal extent of the grating,
thereby enhancing cancellation of the scattered
component.

The analysis follows by considering the product of the
index profile and modal profile 15: the wider and flatter
30 this product is, the narrower its Fourier transform, and
hence the narrower the k-space representation in the
normal direction. This increased restriction on the
23

phase-matching condition decreases the range (for example, in terms of output angle) over which a guided wave can couple to radiative modes, and hence reduces the aggregate scattering loss.

5   Referring also to Figure 2 there is shown a k-space illustration of the rationale behind baseband exclusion. Including the k-space baseband (i.e. low spatial frequencies) as an additional "region of interest" improves synthesis by drastically reducing the unwanted

10   higher-order coupling mediated by small-k components.

In alternate embodiments, supergratings may be implemented using any means of varying the effective (or modal) refractive index, including a surface relief embodiment (see Figure 31). One alternative is to effect

15   changes in modal index by varying the lateral dimension(s) of a one-dimensional waveguide. This can be accomplished in the case of a ridge waveguide 30 by varying its width, as shown in Figure 3 from a logic zero to a logic one value. This embodiment possesses many

20   advantages: the waveguide 30 and BSG 31 can be patterned and etched together, thereby simplifying fabrication; the waveguide and grating are automatically self-aligned, easing tolerances; and grating multi-level supergratings can be produced as easily as two-level BSGs.

25   2D (two-dimensional) supergratings

In one embodiment, the BSG takes the form of a one-dimensional sequence of high-index and low-index lines, and can emulate the near-arbitrary superposition of k-vectors (i.e. spatial frequency components) of differing

30   magnitude but like orientation. The BSG can be extended to two dimensions, where it takes the form of a matrix of

high- and low- index pixels implemented in the plane of a
planar waveguide; this can be further extended to include
any number of discrete levels. The 2D BSG (and the more
general 2D supergrating) can emulate the near-arbitrary
5   superposition of k-vectors of differing magnitude and
differing orientation (within the plane of the grating).
In practical terms, this means that the 2D BSG can route
and focus light according to wavelength and in-plane
input and output angles, thereby permitting
10   functionalities such as beam-shaping, wavelength-
selective lensing, and spatial multiplexing and
demultiplexing.

2D supergratings embodiments

Referring now to Figure 4 there is shown a schematic of a
15   prototypical 2D "supergrating" 40, referred to as a BSG,
standing for binary supergrating. A 2D supergrating is an
optical device having a 2-dimensional array of index-
modulated, effective-index-modulated, gain-modulated
and/or loss-modulated pixels nominally employing a finite
20   set of two or more levels of the modulated parameter or
parameters, and used in such a way that light propagates
in the plane of the array. The term "propagation layer"
will be used in referring to the layer through which the
light travels. The term "modulation layer" will be used
25   to refer to the layer carrying the physical change that
causes the change in the modal index of refraction of the
structure. In some cases, the two layers will be the
same – e.g. when ion implantation is used. In other
cases, they will be different as when a cladding layer is
30   etched or when a controllable finger is applied to make
contact with the propagation layer. Those skilled in the
art will readily be able to understand when the terms are

used. The pixels can be arranged in any ordered or
periodic structure, e.g. a lattice arrangement, and can
employ any arbitrary but repeating shape. Shaded pixels
indicate a high index value and blank pixels indicate a
5   low index value. Examples are arrays of rectangular
pixels on a rectangular array, point scatterers in a
triangular mesh, or hexagonal pixels in a hexagonal mesh.
The manufactured form of this device can exhibit non-
binary or even a continuum of modulation levels due to
10 the technical difficulties associated with producing a
perfect physical structure, but the pixels are
nonetheless inscribed with a finite set of inscription
methods or parameters corresponding to the ideal set of
levels that makes the device a 2D BSG. Such a device can
15 allow angle- and wavelength-specific optical processing,
in addition to emulating traditional optical components
such as mirrors and lenses.

The pixels of a 2D BSG are the quantized representation
of an analog profile that has been quantized by a method
20 that preserves Fourier information (neither adding or
subtracting features significantly) in one or more
regions of interest in the two-dimensional spatial
frequency representation of the grating, that correspond
to regions of interest in terms of angle- and wavelength-
25 specific diffraction characteristics.

Synthesis of 2D supergratings

One method of synthesizing two-dimensional supergratings
may be as follows:

30

A)   Determine a set of mathematical conditions that
describe the electromagnetic fields at the inputs and
outputs of the BSG in all modes of operations and
wavelengths.

5   B)   Compute an analog profile by solving a system of
equations corresponding, say, to the Born approximation
with boundary conditions corresponding to the input-
output conditions.

C)   Digitize the analog profile using a two-dimensional
10 technique designed to maintain Fourier components within
one or more regions of interest. One suitable method is
Floyd-Steinberg dithering, where the quantization error
made at each pixel is spread to the yet-to-be-quantized
pixels using a finite impulse response function
15 containing spectral information in the region(s) of
interest.

The process of grating synthesis may be illustrated with
20 reference to a simplified example. Figure 36A shows a
simple demultiplexer 36-10 for separating radiation
coming in from below on waveguide 36-2 and having two
wavelengths La and Lb into two outgoing paths 36-4 and
36-6, each having a single wavelength, Figure 36B shows a
25 simple demultiplexer using discrete components that
performs the same function. The example of Fig 36B uses a
prism 3 to separate the incoming wavelengths along two
paths 24' and 26' (both beams being bent in the same
direction). The separated radiation beams are bent back
30 into the correct path to enter the outgoing waveguides 4
and 6 by prisms 34 and 36. The beams are then focused
into the waveguides 4 and 6 by lenses 34' and 36'.

27

Figure 36A shows the same functions being carried out by
an embodiment formed in a planar waveguide by solid-state
techniques. An X-Y (directions indicated by axis 36-15)
5   array of pixels, denoted by lines along the left edge and
bottom of box 36-10 form a BSG that perform the functions
of separating the beams (in this case bending one
wavelength to the left and the other to the right) at
angles that vary with distance (angles A1 and A2 and B1
10   and B2) to provide separation. The angles are reversed
in the region denoted by brackets 36-34 and 36-36, where
the pixels perform the angular change and also focus the
radiation. At the lower portion of box 36-10, the
wavefronts are indicated by straight lines and at the
15   upper portion, denoted by curved lines representing the
result of focusing into the outgoing waveguides 36-4 and
36-6.

It will be appreciated that the example of Fig 36A is
20   simplified in that the pixels in the upper portion only
process a single wavelength, since the radiation has been
separated in space. In many actual embodiments of a
demultiplexer, the outgoing paths will be close or
superimposed and the pixels will be processing more than
25   one wavelength. It is an advantageous feature of the
invention that the synthesis of a refractive index
profile to carry out the required functions is performed
mathematically, rather than by illuminating a layer of
material by a first interference pattern, then a second
30   pattern, etc., as in the past.

Referring to Figure 5, a 2D BSG can be used in
applications and devices that use 1D supergratings 50 or
other types of gratings in order to provide potential

5   advantages. These advantages stem from the fact that the
two-dimensional grating has well-defined coupling wave
vectors in both dimensions of the grating plane, and
hence offers direct control over coupling with radiative
modes and, therefore, the potential for reduced

10 scattering. The 1D grating 50, in contrast, often has
coupling wave vectors that are poorly defined in the
direction perpendicular to the waveguide, due to its
narrow width.

The "effective one-dimensional grating" corresponding to

15 a given two-dimensional grating can be thought of as the
1D index profile derived by integrating the 2D grating
along lateral lines perpendicular to the 1-dimensional
guiding. This effective 1D grating has index levels that
span a wide range of values between the two binary

20 levels, and with sufficiently high lateral sampling can
be almost analog in character (the number of levels will
be 2^l for l binary lateral samples). As analog gratings do
not suffer from quantization problems, this can be used
as a method for a multi-level grating design that still

25 enjoys the robustness and eased fabrication benefits of a
binary-like physical structure.

The method can be summarized as including the following
steps:

  • Compute an analog profile as with the prior method.

30   • Convert each pixel into a line of binary (or multi-
    level) pixels, placed in the lateral direction

29

perpendicular to the 1D grating axis in such a way that
the average taken along that line closely fits the
desired analog value. This set of pixels is preferably
constrained to maintain certain symmetry properties in
5   order to reduce coupling to higher modes (with the
tradeoff of limiting the number of available lateral
averages). This line can be computed using a DSM-like
process (fed with the desired averaged value or with a
desired lateral profile); with a random-search
10   optimization method (for small numbers of pixels); or
by other methods.

The 2D supergrating can be implemented in a 1-dimensional
configuration by first sufficiently widening the 1D
waveguide to contain the 2D supergrating. The waveguide
15   can extend beyond the area and there contract to a
smaller (possibly single-mode) size. Additionally, two
waveguides can expand into such a 2D grating area (and
similarly contract on the other side) to create waveguide
couplers. 2D supergratings also offer reduced scattering
20   when implemented in conjunction with supergrating
waveguide couplers.

3D (three-dimensional) supergratings

The BSG can be further extended to three dimensions,
where it takes the form of a three-dimensional array of
25   high- and low- index pixels. As before, this definition
can be expanded to include any number of discrete levels.
The 3D BSG (and the more general 3D supergrating) can
emulate the near-arbitrary superposition of k-vectors
(i.e. spatial frequency components) of any magnitude and
30   orientation within one or more regions of interest
defined in 3D spatial-frequency space. In practical

terms, this means that the 3D BSG can route and focus
light according to wavelength, input angles (i.e. polar
and azimuthal), and output angles, thereby permitting
functionalities such as those described for two-
5   dimensional gratings, but in the three dimensions of
wavelength, polar angle, and azimuthal angle.

Referring to Figure 6 there is shown a schematic of a
prototypical 3D supergrating 60 in an optical device
including a 3-dimensional array of index, effective-
10   index-, gain- and/or loss-modulated pixels; nominally
employing a finite set of two or more levels of the
modulated parameter or parameters. The pixels can be
arranged in any ordered or periodic structure and can
employ an arbitrary but repeating shape. The manufactured
15   form of this device can exhibit non-binary or even a
continuum of modulation levels either by design or due to
the technical difficulties associated with producing a
perfect specimen, but the pixels are nonetheless
inscribed using a finite set of inscription methods or
20   parameters that correspond to the ideal set of levels
that makes the device a 3D BSG. Such a device can allow
angularly and chromatically specific optical processing,
in addition to emulating traditional optical components
such as mirrors and lenses.

25

Synthesis of 3D supergratings

Methods for synthesizing 3D supergratings include
approaches very similar to those described above for 2D
supergratings, except that the equations describe 3-
30   dimensional spaces and the quantization method uses a 3-

31

dimensional impulse response function to distribute the
quantization error.

A 2- or 3-dimensional supergrating can be designed to
create a structure featuring a complete or incomplete
5   photonic band-gap (PBG). This can be done by designing a
grating with any of the BSG design methods that possesses
spectral features within or near the desired band-gap
with sufficient strength and density to create the gap.
Synthesis can involve the entire applicable area, or
10 apply on a smaller scale to create a pattern that can be
tiled to cover a larger area. The design may also use
higher-order synthesis methods to allow for reduced
resolution requirements.

A complete photonic band-gap material is one that
15 exhibits a range of frequencies that cannot propagate
through the medium, regardless of the propagation
direction. The applications of such a medium are numerous
and abound in the literature. Some examples are: optical
filters and resonators, inhibitors or enhancers of
20 optical radiation, materials for (super-) prisms,
environments for novel laser and detector structures, and
substrates for optical guiding and wiring.

The BSG-based photonic band-gap offers key advantages
over prior-art PBG materials, including: lower index-
25 contrast requirements, and relaxed resolution
requirements (both leading to higher compatibility with
optical devices and eased manufacturing).

Synthesis of supergratings by optimization

A general method of designing supergratings of the one-,
two-, or three- dimensional variety is presented here in
addition to the methods described above:

5   • Generate an analog profile with a procedure such as
         that of the first synthesis method (let the function be
         called P).

         • Generate a filter H that determines the wavelength
         range(s) of importance (in which spectral features are
10   conserved) and their weights. H essentially assigns a
         weight for each frequency, where a high weight leads to
         better preservation of spectral information than a low
         weight. The filter H can be written in the form of a
         matrix operator to allow for a matrix solution of the
15   following step, but may also employ impulse-response or
         pole-zero forms.

         • Solve the optimization problem:

$$\min_{X,V} C = \min_{X,V}\left[\sum |H(P-X)|^L + \sum_i V_i\left(X_i - n_{low}\right)\left(X_i - n_{high}\right)\right]$$

20   where X is a vector containing the values of the
         BSG, V is a vector of Lagrange multipliers, and L
         determines the type of norm for the optimization (L=2
         corresponds to least-squares optimization, for example).
         The Lagrange multipliers force the BSG values to one of
25   the allowed index values (n_{low} or n_{high}), leading to a
         binary form. The function can be modified to allow for
         multi-valued supergratings in accordance with the
         teachings of the present invention.

                                     33

The optimization can be carried out using any optimization method, although Newton-type methods are particularly useful and are presently preferred because of the matrix nature of the equation.

5   The approach can be applied to the synthesis of 2D and 3D gratings by taking the analog profile generated by the corresponding synthesis method and performing a similar optimization procedure, with the matrix equation modified to properly account for the dimensionality. This can be

10   done by stacking the rows of the 2-dimensional grating into one row of the X variable, likewise with the P variable, and synthesizing a corresponding H matrix.

An H matrix can be generated as a Toeplitz matrix of a given impulse response function, or with other methods

15   including:

Let h_f be a vector representing the importance weight of the spatial frequency f. Then H is given by:

$$H = F^{-1} \text{diag}(h_f)F \, ,$$

where the n-dimensional F is the Fourier matrix given by:

20   $$F_{jk} = \frac{1}{\sqrt{n}} e^{2\pi i jk/n} \quad (i = \sqrt{-1}) \, .$$

Multiplication by the matrix F is equivalent to taking a Fourier transform of a vector, an operation which can be sped up by using the Fast Fourier Transform (FFT) method. This fact can be used with H filters of this sort to

25   speed up the calculation of the cost function and its derivative to order n log(n).

Another alternative is to perform the optimization in the Fourier domain by considering both the P and X variables as their Fourier representations (generated by

34

multiplying by F), while suitably converting the equality
constraints:

$$\min_{\widetilde{X},\widetilde{Y}} \widetilde{C} = \min_{\widetilde{X},\widetilde{Y}} \left[\left| h_f{}^T (\widetilde{P} - \widetilde{X}) \right|^2 + \widetilde{X}^T F \operatorname{diag}(V) F^{-1} \widetilde{X} - V \right]$$
$$\widetilde{P} = FP, \quad \widetilde{X} = FX$$

This representation can have the advantage of allowing

5   for sparse representations for the $\widetilde{P}$ and/or h_f vectors,
which can help reduce the computation time.

Tuning mechanisms for supergratings

The spectral characteristics of a supergrating can be
10 shifted by any mechanism that produces a change in
effective modal index. This can be accomplished if an
electro-optic, electro-strictive, magneto-optic,
electrochromic, and/or photosensitive medium is present
as part of the device thereby allowing one or more of the
15 design parameters to be modified using electronic
control. Alternatively, modification of one or more of
the design parameters can be effected using a change of
the temperature, application of mechanical stress, and/or
illumination of either the whole device or a section
20 thereof.

Tuning mechanisms can include, but are not restricted to,
the following: thermal, electro-optic, magneto-optic,
opto-restrictive, mechanical strain (external, piezo,
electrostatic, magnetostatic, accoustic), current
25 injection, optical illumination, liquid crystal,
reconfigurable molecules, chemical interaction, and
mechanical translation.

35

For some devices, the benefit corresponds to a shift or
change in strength of spectral characteristics; for
others, functionalities beyond this emerge. In any case,
it is implicit throughout this patent application, and in
5   all device descriptions that follow, that the
functionality of devices employing static supergratings
can be further enhanced by replacing these with tunable
supergratings.

Programmable supergratings

10 Referring to Figures 7a-7d, there are shown exemplary
embodiments of programmable supergratings. A programmable
supergrating is a device that includes, in part, an array
of electrically addressable electrodes together with a
suitable medium, whereby the electrodes are used to
15 establish a grating pattern in the medium. The grating
pattern can be programmable, dynamic, or fixed. The
grating pattern can nominally utilize a finite number of
modulated levels (e.g. two levels for a BSG, more for a
supergrating), or utilize a continuum of modulated
20 levels.

Another embodiment (Figure 7a) includes an array of MEMS
(micro- electro- mechanical system) 7a2 fingers placed
above one or more waveguides 7a3; where each finger
`corresponds to a "bit" of the BSG, and can be
25 individually deflected downwards to touch the waveguide
7a2 surface. Alternately, the "off" state can correspond
to contact between finger and waveguide, with "on"
deflection upwards and away from the waveguide. In any
case, the state with waveguide contact will generally
30 yield a higher effective index, and that with no contact
will yield a lower index. The preferred embodiment has an

36

off-waveguide separation sufficiently large that slight
errors in this value negligibly change the lower
effective index value, thereby facilitating true binary
operation.

5   Yet another embodiment, shown in Figure 7b includes a
plurality of electrodes disposed over encapsulated liquid
crystals 7b2 (LCs) that affect propagation. In the
nematic phase, LCs exhibit a birefringence that can be
tuned with voltage, thereby yielding a means of tuning
10   effective index. This voltage-dependence typically has
some threshold voltage V_t (corresponding to full alignment
of nematic LCs) above which little or no further index
change occurs. A method employing control voltages of
$V = 0$ and $V > V_t$ should therefore facilitate true binary
15   operation, even in the face of confounding effects such
as field fringing.

Co- and counter- directional asymmetric-waveguide BSG
couplers

We begin by describing two fundamental elements of many
20   of the more complex devices that follow: namely, co-
directional and counter-directional asymmetric-waveguide
BSG couplers. These elements (which can indeed be devices
in themselves) couple light from one waveguide to another
parallel waveguide, with a desired spectral response:
25   i.e. light at a given wavelength can be coupled fully,
fractionally, or not at all, and with a desired phase.

The general embodiment, Figure 7c, includes two parallel
asymmetric waveguides, which will have differing
effective modal indices $(n_{eff})_1$ and $(n_{eff})_2$, and hence
30   different propagation vectors $k_1(\lambda_0) = 2\pi(n_{eff})_1/\lambda_0$ and
$k_2(\lambda_0) = 2\pi(n_{eff})_2/\lambda_0$, where λ_0 is free-space wavelength.

The effective indices will in general be dependent on
wavelength λ_0. Signals from electronics drivers 7c3 are
applied to electrodes denoted by 7c2 that change the
modal distribution to induce coupling.

5   Light will couple co-directionally from one waveguide to
another neighboring waveguide if their respective modal
profiles overlap; this is known as intrinsic coupling,
and will generally occur for all input wavelengths.
Intrinsic coupling is a parasitic effect in the context
10   of BSG-enhanced coupling, and the optimal design seeks to
ensure that the latter dwarfs the former. This condition
becomes easier to satisfy as waveguide asymmetry (i.e.
the difference between $(n_{eff})_1$ and $(n_{eff})_2$) increases.

15   Co-directional asymmetric-waveguide BSG coupler

Referring to Figure 8, there is shown a schematic of co-
directional asymmetric-waveguide BSG coupler 80. Co-
directional coupling from one waveguide 81 to another
neighboring waveguide 82 (i.e. with overlapping modal
20   profiles) will be enhanced at a particular wavelength λ_0
if the waveguides' effective indices are perturbed with
spatial frequency $K_g(\lambda_0) = k_1(\lambda_0) - k_2(\lambda_0)$. This can be
accomplished using any BSG embodiment, including
possibilities such as, but not limited to, placing a BSG
25   83 between the two waveguides, as described above; or
implementing BSGs laterally in one or both waveguide,
also described above. Arbitrary spectral coupling
characteristics are achieved by having the BSG 83 emulate
the appropriate spectrum of $K_g(\lambda_0)$.

30

Counter-directional asymmetric-waveguide BSG coupler

Referring to Figure 9 there is shown a schematic of
counter-directional asymmetric-waveguide BSG coupler 90
coupling waveguides 91 and 92. For the above embodiment,
5   counter-directional coupling will occur for a given input
wavelength λ_0 if the index perturbation instead includes a
spatial frequency of $K_g(\lambda_0) = k_1(\lambda_0) + k_2(\lambda_0)$. The BSG 93
should be kept free of spatial frequencies of $2k_1(\lambda_0)$ and
$2k_2(\lambda_0)$ over the entire spectral band of interest, as
10 these will produce back-reflection within the respective
waveguides, thereby decreasing coupling efficiency and
yielding undesired back-reflection. Satisfying this
condition requires that waveguide asymmetry be sufficient
to avoid any overlaps between grating spatial frequencies
15 (K_g's) yielding inter-waveguide coupling and those
yielding intra-waveguide coupling, over all wavelength
range(s) of interest; mathematically, this can be
expressed as:

$$k_1(\lambda_1) + k_2(\lambda_1) \neq 2k_1(\lambda_2) \quad \text{and} \quad k_1(\lambda_1) + k_2(\lambda_1) \neq 2k_2(\lambda_2)$$

20 where k_1 and k_2 are defined earlier with wavelength-
dependent effective index, and λ_1 and λ_2 are any
combination of wavelengths lying within the range(s) of
interest.

It will be appreciated that if either of the waveguides
25 is multimode, other overlaps should also be avoided,
namely   between   the   range   of   grating   frequencies
pertaining to desired and undesired coupling (whether co-
or counter-directional).

Counter-Directional Symmetric-Waveguide BSG Coupler

Referring to Figure 10 there is shown a schematic of
counter-directional symmetric-waveguide BSG coupler. The
symmetric BSG counter-directional coupler performs the

5   same functions as the asymmetric counter-directional
coupler (programmable, dynamic or static) but allows the
two waveguides to be weakly asymmetric or even symmetric
in their effective index. Thus, the limits expressed in
the previous expression can be exceeded, albeit that this

10   would normally lead to intra-waveguide reflection. The
method outlined below allows for efficient coupling
between neighboring symmetric waveguides, while
suppressing intra-waveguide reflection.

The device includes two waveguides (symmetric or

15   otherwise) with a BSG 612 placed between them. The BSG
can be static, tunable, or programmable as necessary. Two
more BSGs 611 and 622, identical to the middle BSG but
with opposite contrast (1's become 0's and vice-versa),
are placed on either side of the two waveguides such that

20   they mirror the center BSG about the corresponding
waveguide.

The principle of operation is as follows: let m_1 be the
modal profile of guide 1 and m_2 be the modal profile of
guide 2. With loose notation, the coupling coefficients

25   relating the two waveguides can be written to first order
in grating strength as:

$$C_{12} \propto \int m_1^* m_2 G_{12} + \int m_1^* m_2 (G_{11} + G_{22}) \cong \int m_1^* m_2 G_{12} \; ,$$

where G_{12} is the center grating and G_{11} & G_{22} are the
gratings on the far side of waveguides 1 and 2

30   respectively. The second term is negligible because the

two side gratings are very far from the opposite
waveguide (more precisely, the opposite waveguide's modal
profile is negligible in this region).

However, the coupling coefficient from the first
5   waveguide to itself (corresponding to intra-waveguide
reflection) follows:

$$C_{11} \propto \int |m_1|^2 G_{11} + \int |m_1|^2 G_{12} = 0 \quad \text{(because } G_{11} = -G_{22} \text{ and symmetry)}$$

The result is identical for the second waveguide. The
only assumption necessary for the cancellation is that
10 the modal profiles of both waveguides be substantively
symmetric (about their waveguide, not necessarily
identical to each other; it will be appreciated that
waveguide coupling will generally introduce at least some
element of asymmetry) and that the gratings be properly
15 symmetrized about the guide. The cancellation is
independent of many material parameters such as the
waveguides' effective indices, even if they vary
independently.

BSG Couplers Using Lateral Waveguide Variations

20 This particular embodiment of implementing a BSG is given
special mention here due to its particular advantages, as
well as some anticipated further subtleties which will be
discussed later, such as: optimal width variation for
asymmetric-waveguide coupling, with particular regard to
25 the relative BSG strength in each waveguide; and how to
design the reverse-contrast grating of the symmetric-
waveguide coupler so as to minimize intra-waveguide
reflection.

The advantages of this embodiment are similar to those
30 described above, distinguished by the fact that there are

now two (or more) waveguides, where the waveguide
alignment is critical. It will be appreciated, that the
waveguides and BSGs can be advantageously patterned and
etched together, thereby simplifying fabrication;
5   further, the waveguides and grating are automatically
self-aligned, easing tolerances.

BSG Crossbar switch

Referring to Figure 11, there is shown a schematic of a
grid-topology cross bar switch. The crossbar switch is a
10 device that routes wavelength channels from a number of
input waveguides to a number of output channels (usually
matching the number of input waveguides). The crossbar
switch generally needs to be able to route any wavelength
from any input waveguide to any output waveguide. These
15 switches are typically denoted by a N x N notation, where
N represents the product of the number of input/output
waveguides and the number of wavelength channels; for
example, a switch with 4 input waveguides, 4 output
waveguides, and 16 wavelength channels per waveguide is
20 called a 64 x 64 switch.

Traditional crossbar switches use a grid topology where
each of the n input waveguides is first de-multiplexed
into its c wavelength channels, resulting in nxc input
"rows" that are crossed over with nxc output "columns".
25 These columns are then multiplexed into groups fed into
the n output waveguides. Routing occurs by means of an
optical switch placed at each intersection of row and
column. This design is especially common with micro-
electro- mechanical systems (MEMS), where the switches
30 are implemented using movable mirrors. Clearly, this
topology requires $(nxc)^2$ switching elements.

42

Another topology can use 2x2 switches, that is, switching elements with two inputs (I_1 and I_2) and two outputs (O_1 and O_2); that either connects I_1 to O_1 and I_2 to O_2, or I_1 to O_2 and I_2 to O_1. The problem lies in choosing the

5   arrangement and number of switches so that the input optical signals can be rearranged to all possible permutations at the output. To determine the number of switches required we can note that there are (nxc)! possible permutations of the inputs; since every 2x2

10   switch provides one bit of control we can say that:

$$O\big(\log_2(nc)!\big) = O\big((nc)\log_2(nc)\big)$$

It will be appreciated that a programmable BSG (e.g., a tunable co-directional or counter-directional coupler as described above) can be used to form the 2x2 switch.

15   Thus, each BSG switching element can provide the 2x2 functionality independently for each input wavelength. Advantageously, this eliminates the need to first demultiplex the input waveguides, and reduces the number of required switches:

20   $$\text{no. of switching elements} = O\big(n\log_2 n\big)$$

where n is the number of input waveguides only, leaving no dependence on the number of wavelength channels c. (See Figure 12, showing a schematic of one embodiment for a 4-fiber switch, utilizing 6 switching elements 120.

25   Another embodiment can use layered 2x2 BSG switching elements, where each layer has the same number of switching elements equaling n/2, where n represents the number of input waveguides, each carrying c wavelength channels. In this embodiment, the switches can be

30   connected with each other in the following way:

43

- Let waveguide w connect to waveguide w + 2^{l-1}, where l is the layer number (starting from 1).

- When $2^l = n$ use the above formula by setting $l = 1$ again (wrap back).

5   This is only one particular wiring method and many more can be conceived, especially by drawing from prior art in binary switching tree design.

The number of switching elements employed by a design of this sort is given by:

10   $$\text{no. of switching elements} = \frac{n}{2} \operatorname{ceil}\left[\frac{\operatorname{ceil}[\log_2(n!)]}{n/2}\right],$$

where the ceil function generates the smallest integer number that is greater than its argument.

It will be appreciated that the savings generated by this design method can be enormous and are illustrated in

15   table 1.

Table 1

Input	wavelength	switching elements		
waveguides (n)	channels per input (c)	grid design	single-wavelength layered design	multi-wavelength layered design
4	16	256	96	6
6	32	1152	384	12
8	64	4096	1024	16

While   the   number   of   switching   elements   in   the

20   supergrating   case   are   given   by   the   formula   above,   the

number of switches in the grid design case are specified
by $c \cdot n^2$, while the number of single-wavelength switches in
the layered design is given by c times the number of
switching elements in the BSG design.

5   In addition, embodiments using Programmable BSGs avoid
the need for multiplexers and demultiplexers, further
enhancing the savings. The single-wavelength design can
also be implemented with co-directional and counter-
directional couplers employing Bragg gratings instead of
10 BSGs.

Direct writing of BSGs in optical fiber

The following sections describe methods of implementing
BSGs in an optical fiber whose index and/or effective
modal index can be altered via exposure to intense and/or
15 high-energy laser light.

One-photon process

Referring to Figure 13 there is shown a One-photon method
of implementing a BSG in optical fiber. In this
embodiment, a grating employing binary or multi-level
20 features (index or effective index change, ablation, loss
modulation, etc.) is impressed upon a photo sensitive
optical fiber 13-1 by means of a switchable, focused
laser beam 13-10, that directly imprints the grating
information on the fiber as it is moved with respect to
25 the laser's focus as indicated by the arrow, at either
constant or variable speed. In an alternate embodiment,
the fiber is stationary and the laser's focus is
manipulated to scan the fiber.

Multi-photon process

Referring to Figure 14 there is shown a Multi-photon
device (two-photon shown here) 140 implementing a BSG in
optical fiber. A method similar to the above, with the

5   exception that two or more laser beams 144,145 are
employed for the process, and the information (i.e. shift
in index) is preferentially imprinted where a subset of
these beams intersect 143 and/or constructively
interfere. It will be appreciated that this embodiment

10   offers advantages whether the underlying photosensitivity
mechanism be intensity-dependent or energy-dependent. In
the former case, the constructive interference of N
(equal amplitude) beams yields N^2 times the intensity of a
single beam; in the latter, the setup can be arranged so

15   that aggregate photonic energy sufficient to effect the
transition in questions exists only where the beams
intersect.

This embodiment allows for increased control over the
region within the fiber upon which the information is

20   impressed (for example, index can be altered only at the
core 141 if the beams are made to intersect here), and
can also simplify manufacturing in that the outer
cladding need not necessarily be stripped, as can be
required for the single-photon process.

25   The following describes alternate embodiments of the
present invention that employ some combination of
supergratings and the modular elements of the previous
section. It will be appreciated that any BSG mentioned
here can be replaced by the more general multi-level

30   supergrating embodiment, which can in turn be replaced by
tunable and/or programmable embodiments in accordance
with the teachings of the present invention.

                              46

Wavelength demultiplexer

A demultiplexer separates a multi-wavelength (i.e. multi-
channel) input into its constituent channels. This
demultiplexer functionality can be achieved using BSGs in
5   a variety of embodiments, described in more detail below.

Multi-level supergratings in accordance with the
teachings of the present invention are also suitable for
demultiplexers and filters with uneven channel spacing
(or any other channel-spacing scheme). It will be
10 recognized that an advantage of such a demultiplexer
embodiment of the present invention advantageously
reduces problems such as SRS (stimulated Raman
scattering), which are compounded when channels are
equally spaced in terms of photonic frequency (energy).

15

Demultiplexer employing 1D supergratings

Referring to Figure 15 there is shown a schematic of a
demultiplexer employing 1D BSG. This device includes, in
part, a set of waveguides coupled using counter-
20 directional and/or co-directional BSG couplers 15-1 – 15-
3, as described above, with the effect that multi-
wavelength light entering the device through a specified
input port is divided into its wavelength components, and
which leave the device through their assigned output
25 ports.

Particular embodiments include: a cascade of co-
directional and counter-directional BSGs, which
successively divide the channels in two sub-bands until
individual channels are extracted; and a sequence of
30 tilted single-channel gratings which direct individual
channels to their respective output waveguide.

47

Demultiplexer employing 2D supergratings

This embodiment, shown in Figure 16, includes a 2D BSG with the effect that multi-wavelength light entering the device through a specified input port is divided into its wavelength components, which leave the device through their assigned output waveguides.

Add/drop filters

In this embodiment, an optical add/drop filter, as shown in Figure 17, is an optical device 170 including an "in" port 171, which accepts an input of multiple wavelength-channels; a "drop" port 172, through which one or more channels separated from the "in" stream are routed; and a "through" port 174, from which the remaining channels emerge. An additional "add" port may also be present, which accepts inputs at wavelength-channels being dropped from the "in" stream, and routes them to the "through" output.

Static add/drop filter

Referring to Figure 18, there is shown an optical device embodiment of the present invention, including one or more 2D BSGs and/or a set of waveguides coupled using counter-directional, and/or co-directional BSG couplers. In this embodiment, one or more wavelength components of light entering the device through a specified input ("in") port 181 is separated and leaves the device through a specified output ("drop") port 184. The remainder of the input light leaves the device through a different output ("through") port 182. In addition, the

device can include an additional input ("add") 183 port
with the property that particular, or all wavelength
components, entering the device through that port, also
leave through the "through" port 182 thereby being added
5   to the light routed there from the "in" port.

Still referring to Figure 18. BSG 1 couples a subset of
input λ's from waveguide A to waveguide B. BSG-2 couples
a subset of the first subset from B to C. This process
continues until only the desired wavelength(s) remain in
10   DROP waveguide. It will be appreciated that BSG-1 and
BSG-2 can be tuned to select desired λ over a range which
exceeds an intrinsic tuning range Δλ/λ ≈ Δn/n. It will be
further appreciated that in alternate embodiments that a
counter directional coupling may be employed. In this
15   embodiment the Add port 183 can be made λ selective
through a similar Vernier approach.

Dynamic add/drop filter

Referring to Figure 19, there is shown an optical device
20   embodiment 190 including one or more 2D BSG and/or a set
of waveguides, where the waveguides are coupled using
tunable or fixed counter-directional and/or co-
directional BSG couplers with the same effective
functionality as the static BSG add/drop filter, but with
25   the addition that the wavelength(s) directed from the
"in" port to the "drop" port and/or the wavelength(s)
directed from the "add" port to the "through" port are
controllable by means of external control signals.

One particular embodiment makes use of the Vernier tuning
30   principle, with a design motivated by the fact that the
spectral shifts accessible through index tuning are often

                                    49

much less than the total desired tuning range. Multi-
channel input enters along one waveguide, with light
coupled to an adjacent waveguide by a multi-peak tunable
BSG (with peak spacing generally less than the available

5   tuning range). A subsequent tunable BSG (generally multi-
peak with a different spacing which also less than the
available tuning range) couples a subset of this first
set of channels to a third waveguide. This decimation
process can continue as desired, with the BSGs

10   independently tuned relative to one another to drop
desired channel(s). The channel selection range can thus
greatly exceed the available index-tuned spectral shift.
The same set of BSGs can be used to add the dropped
channels from a second input, as shown in Figure 18.

15   Another embodiment uses a programmable BSG, enabling a
structure such as that shown in Figure 19 that can
dynamically add and drop any subset of input channels.

Wavelength stability monitor

To function properly, optical networks require that
20   channel wavelengths remain within some range of their
nominal value. Drifting can be caused by a number of
factors, including variations in environmental
conditions, device aging, and mechanical disruptions.

Wavelength drift can be monitored using a 1D supergrating
25   in accordance with the teachings of the present
invention, as shown in Figure 20a. While light incident
at a given input angle on a tilted 1D 20a3 grating will
nominally diffract at only a particular output angle,
detuning from a central peak-reflectance wavelength will
30   in fact yield a detuning in angle, along with a decrease
in diffraction efficiency.

This behavior may be used to detect shifts in wavelength,
or, assuming the wavelength to be true, shifts in device
characteristics which can then be compensated through a
variety of mechanisms (e.g. temperature tuning). In one
5   embodiment, a photodetector array 20a4 symmetrically
aligned along the diffraction path 20a2 of the desired
central wavelength may be used to detect wavelength
shift; in this configuration, the signal from each will
match if local wavelength matches the desired value.
10 (Note that diffraction efficiency will normally be
intentionally low, so that most power passes through un-
deviated.) Deviations in local wavelength are then
manifested by a change in the relative values of the
photodetectors 20a4, which can be monitored by passing
15 their outputs through a logarithmic subtraction processor
20a5 (other more sensitive functions may be employed).
These deviations can then be corrected for using
temperature or any other influencing parameter.

Similarly, an alternate embodiment can be implemented
20 with a 2D BSG 20b4 as shown in Figure 20b, which can
focus diffracted light to the detectors 20b3 and/or
detect drifts in wavelength on several channels
simultaneously; or with a sequence of quasi-1D (i.e.
point-source) features 20c3 etched along a waveguide 20c2
25 as shown in Figure 20c (detection and processing being
done in units 20c3 and 20c4), which will lead to
symmetric diffraction in both lateral directions. A
mirror may optionally be etched at one side, for optimal
collection of scattered light.

Tap-off network monitor

To dynamically re-configure channel assignments
("wavelength provisioning"), a network requires feedback
on channel usage; such reconfigurability is particularly
5   needed for metropolitan optical networks (MONs).

Network monitoring can be accomplished using 1-D or 2-D
supergratings in accordance with the teachings of the
present invention (Figure 21 shows a 2D network monitor
embodiment) to tap off a portion (typically small by
10 design) of input light and separate it into individual
channels. The separated channels are then focused on a
detector array 212, where their power is measured and the
information converted into a single electrical signal.
This signal can be processed by processor 214 and
15 transmitted to a monitoring station (not shown) in a
metro network along an electrical network, and provide
diagnostic data facilitating wavelength provisioning; or
aid in identifying problems in the network (e.g. showing
where a channel is losing power); compiling load
20 statistics; and measuring fault tolerance.

Multi-wavelength equalizer and gain-flattening filters

For optimal functioning, optical networks generally
require that wavelength channels be balanced in power.
Balancing typically occurs either within, or following
25 the amplification stage, and is correspondingly named
"gain-flattening" or "equalizing" respectively. A power-
balancing device can additionally serve to suppress
undesired signals such as the pump wavelength in optical
amplifiers.

52

Dynamic multi-wavelength equalizer

In this equalizer embodiment, dynamic equalization can be
achieved by routing input wavelengths through a tap-off
network monitor (Fig 22A) that separates channels and
5   monitors their respective power levels (see Figure 22B,
showing a curve of power versus wavelength). The signals
are then transmitted to an electronic processor, whose
output tunes (or programs) a sequence of BSGs in
accordance with teachings of the present invention, which
10   equalize the power across channels, e.g. by removing
power in various wavelength bands. Fig. 22C shows an
example of power removed as a function of wavelength.
Suitable, methods for clipping wavelength power include
using BSGs to couple input channels to an output
15   waveguide with lower efficiency or using BSGs to impose
higher scattering losses. Fig 22D shows the result of
subtracting appropriate amounts of power in a set of
wavelength bands, thereby producing substantially equal
power in each band.

20   One embodiment employs a cascade of BSGs that includes
"basis functions" which can be independently tuned to
effect the loss spectrum required for equalization;
suitable basis functions include step-like spectra that
can be shifted relative to one another.

25

Gain-flattened optical amplifiers

Figure 23 illustrates an alternate channel-balancing
embodiment. In this embodiment a BSG 23-1 (Fig 23A) is
incorporated directly within the amplifier that serves to
30   shape the gain spectrum as desired. The gain spectrum
(shown unperturbed in Fig 23B) can be flattened, or

tailored to any other profile, perhaps in anticipation of
wavelength-dependent losses following amplification. Fig.
23C shows a loss coefficient spectrum matched to the gain
spectrum of Fig 23B. Fig. 23D shows the combined gain
5   coefficient spectrum, combining the gain of the medium
and the losses imposed on it. It will be appreciated that
this embodiment offers much greater efficiency than
typical post-amplifier equalization, which follows from
recognizing that flattening the gain coefficient (the
10   gain per unit length within the amplifier) wastes far
less power than flattening post-amplification gain.

Gain flattening, in accordance with the teachings of the
present invention, can be applied to any optical
amplifier, including Raman amplifiers, erbium-doped fiber
15   amplifiers (EDFAs), and semiconductor optical amplifiers
(SOAs); as well as to multi-wavelength sources such as
tunable lasers.

It will be appreciated that, gain flattening not only
improves efficiency, but also can dramatically extend
20   amplifier bandwidth, particularly where the intrinsic
gain spectrum is strongly peaked. This is especially true
with semiconductor optical amplifiers (SOAs), whose
bandwidth is so narrow as to provide gain for only a very
few (often one) channels.

25   Lambda router

Lambda routers – also known as called wavelength routers,
or optical cross-connects are devices positioned at
network junction points which route wavelength(s) from a
specific fiber optic input to another specific fiber
30   optic output. Lambda routers are generally NxN devices
(i.e. with N input fibers and N output fibers), with each

input fiber typically conveying a single wavelength channel.

In a Lambda routing embodiment of the present invention, Lambda routing can be accomplished by coupling

5   demultiplexed input from a BSG-based device into an array of waveguides as shown in Figures 24a and 24b (i.e. one channel per waveguide). It will be appreciated that figures 24a-24b represent lambda routers when there is one input/output fiber and cross-bar switches when there

10   are multiple input and output fibers. A second array of waveguides exists beneath the first set, with each pair of top-waveguides and bottom-waveguides separated by a BSG with a flattop spectrum centered at the channel wavelength (i.e. co-directional or counter-directional

15   coupling). Cross/bar operation (i.e. channel light on one waveguide will couple to the other, and vice versa; or will remain on the same waveguide) is achieved by locally tuning the BSGs in or out of alignment with the channel wavelength. It will be appreciated that add/drop

20   functionality is a built-in aspect of this embodiment.

In Fig 24b, a grid topology router accepts multiplexed input on the left, having more than on incident wavelength on a channel in a lower

25   waveguide. At each intersection, a pass-band BSG couples wavelengths in a particular channel to the waveguides in an upper waveguide, running vertically in the drawing. The result is that $\lambda_{i,j}$ (wavelength lambda entering on the i^{th} guide and having a

30   wavelength for the j^{th} channel) is combined with the radiation of the same channel coming from other inputs.

<div align="center">55</div>

Figure 24A, having the same topology as shown in
Figure 12, is a more efficient arrangement for
achieving the same result.

5   Dispersion-slope compensator

Optical networks generally contend with a property known
as dispersion, especially where long transmission
distances and high bit-rates are involved. Dispersion
arises from the wavelength-dependence of effective index,
10   which in turn produces a wavelength-dependent group delay
spectrum for a given type and length of optical fiber.
The spectrum of an optical pulse is necessarily finite
(i.e. non-zero) in width; dispersion therefore spreads
out a pulse as it travels along a fiber, because its
15   various wavelength components will travel at slightly
different speeds.

Dispersion compensation can be achieved by "chirping" a
Bragg grating: modulating a grating's pitch along its
length z, as shown in Figure 25. Figure 25A shows an
20   embodiment in which the chirped grating is associated
with a circulator. Radiation is directed into the
grating, processed and returned to the circulator.
Figure 25B shows a transmissive fiber design. Figure 25C
shows a counter-directional BSG in which the grating the
25   couples two fibers also performs the chirping. Figure
25D shows a co-directional design. These designs produce
a wavelength-dependent phase spectrum which can be
tailored to provide the desired group delay spectrum:
$\tau_g = -d\phi/d\omega$. The delay for a given free-space wavelength
30   λ_0 then follows from the round-trip distance to where

local pitch has λ_0 as its Bragg wavelength:

$\tau_g(\lambda_0) = 2n_{eff}z(\lambda_0)$, where $z(\lambda_0)$ is the spatial coordinate

at which $\Lambda(z) = \lambda_0/2n_{eff}$.

5   One dispersion embodiment of the present invention begins

by determining the ideal (analog) input chirp function,

as derived from the group delay spectrum $\tau_g(\lambda_0)$ (grating-

imposed delay should of course be the opposite of that at

the input). The ideal analog profile is then fed into a

10   quantization filter producing a binary profile that

emulates the desired phase characteristics. The

quantization filter can be further optimized for minimal

phase noise.

Alternate dispersion embodiments stem more directly from

15   the desired group delay spectrum.

It will be appreciated that a variety of these types of

embodiments are possible. One embodiment includes a 3-

port circulator (light input at port i exits at port i +

1, with port 3 "wrapping around" to port 1) that directs

20   light input to port 1 to a waveguide via port 2. A

reflective BSG, in accordance with the teachings of the

present invention, in the waveguide effects the desired

compensating group delay spectrum, thereby directing the

dispersion-compensated light back to port 2 of the

25   circulator, following which it emerges at output port 3.

An alternate embodiment shown in Figures 26a and 26b that

avoids the need for (and cost of) a circulator employs

co- directional and/or counter-directional BSG couplers,

which couple light from an input waveguide to subsequent

30   waveguide(s) so as to impose the desired group delay

spectrum. Depending on factors such as the compensation
bandwidth, the temporal span of the group delay spectrum,
and whether compensation is full-band or channelized, the
intra-device propagation length can exceed the maximum
5   desired device size. In this case, dispersion
compensation can be effected over successive waveguide
couplings, with coupled waveguides arranged in a winding
cascade.

It will be appreciated that embodiments of BSG-based
10   dispersion compensators offer many advantages such as
emulating complicated chirp functions in a simpler   ·
fashion than present methods (present methods either
tackle successive terms in a Taylor expansion of the
dispersion characteristic, or achieve a "best-fit" to the
15   ideal delay spectrum using relatively few input
parameters). Embodiments using BSG devices in accordance
with teachings of the present invention can also provide
dispersion compensation individually tailored to multiple
simultaneous channels, offering an improvement over
20   solutions, which impose the same correction across all
channels. Also, in contrast to some chirped-grating
approaches, the embodiments using BSG devices in
accordance with teachings of the present invention can be
designed to yield a flat in-channel reflectance spectrum.

25

Tunable dispersion compensator

Tunable dispersion compensation can be achieved through
an arrangement bearing some similarity to a combination
of the cascade of co-directional and counter-directional
30   BSGs described above, and the earlier disclosed Vernier-
tuning method, along with the dynamic multi-wavelength

equalizer, also described above. Referring to Figure 26a, the cascade of BSGs includes group delay "basis functions" which can be independently tuned relative to one another to effect the desired group delay spectrum.

5   One embodiment, illustrated in Figure 26B, employs two tunable counter-directional BSG couplers, each implementing quadratic dispersion functions D_1 and D_2, with the functional forms:

$$D_1 = a_1(\lambda - \lambda_1)^2 + C_1 \quad \text{and} \quad D_2 = a_2(\lambda - \lambda_2)^2 + C_2,$$

10   where the center wavelengths λ_1 and λ_2 can be shifted independently through a tuning mechanism such as those outlined above. If the BSGs are cascaded and designed with $a_2 = -a_1$, the resulting dispersion is:

$$D_{net} = D_1 + D_2 = [2a_1(\lambda_2 - \lambda_1)] \lambda + [(\lambda_1^2 - \lambda_2^2) + (C_1 - C_2)],$$

15   which can be re-written in terms of $\Delta\lambda = \lambda_2 - \lambda_1$:

$$D_{net} = [2a_1(\Delta\lambda)] \lambda + [(2\lambda_1 + \Delta\lambda)(2\lambda_1 - \Delta\lambda) + (C_1 - C_2)]$$

Thus, dispersion slope $2a_1(\Delta\lambda)$ can be adjusted as desired by appropriately selecting $\Delta\lambda$, and the intercept is set by appropriately setting λ_1. This approach can be applied

20   to arbitrarily high orders of dispersion by employing next-higher-order dispersion basis functions.

Variable-feedback supergrating laser (tunable and/or multi-wavelength)

Referring to Figures 27a-27c, there is shown embodiments

25   of variable feedback supergrating lasers. In these embodiments, the programmable BSG is combined with an optical gain medium to produce a tunable laser with single-wavelength or multi-wavelength operation. In

Figure 27A, two programmable BSGs can create resonance at one or more wavelengths. In Figure 27B, a programmable BSG grating within the gain medium can control the output spectrum and also its power distribution. In Figure 27C,
5 the programmable BSGs can change the wavelength and also the angle, so that the wavelength and also the phase of the output radiation can be controlled.

It will be appreciated that any configuration employing
10 gratings as feedback elements, including but not limited to DBR, DFB, alpha-laser, and ring oscillator configurations, can be retrofitted by replacing some or all of the corresponding diffractive element(s) in the traditional design with programmable BSGs, in accordance
15 with the teaching of the present invention.

For a single-wavelength laser embodiment, the BSG-based device can control the position of the laser line, its line width, and/or its strength. In addition, it can be combined with monitoring of the above parameters
20 (directly or indirectly, such as through temperature, current, or voltage) to form a feedback system, to control one or more of these same parameters.

The BSG's design (or "program") can be altered in an otherwise similar configuration to produce a multi-
25 wavelength laser, offering independent control for each of several laser wavelengths or selection of a single wavelength. Lasing channels can be tuned, added, and dropped independently, and their relative output power can be balanced as desired. As described above, a monitor
30 can be added to form a feedback loop to control any of these parameters.

Beam combiner (reverse of beam-splitter)

A beam combiner as embodiment, as shown in Figure 28,
accepts input from one or more sources and streams them
5   into a common output. In Figure 28A, successive BSG
couplers add power at one or more wavelengths to the
power flowing from left to right in the horizontal
waveguide. In Figure 28B, a two-dimensional BSG accepts
three inputs and directs the radiation out along the
10   waveguide. Applications include combining the power from
multiple lasers (termed "power combiner" in this
context), as is done for example with Raman amplifiers to
achieve sufficient pump power. It would be especially
attractive in this case to integrate such a device
15   directly with the semiconductor laser array; the BSG is
very well suited for this purpose.

A variety of embodiments are possible, including some
combination of one or more BSG couplers and 2D
supergratings to combine multiple beams (possibly of the
20   same wavelength) into one. In the case of the 2D
supergrating, this essentially corresponds to the reverse
of splitting an input into multiple output beams.

Multi-wavelength/broadband isolator/circulator

Optical isolators are devices that block the passage of
25   one or more wavelengths along a waveguide, in one or both
directions. They are used to suppress back-reflection,
cross talk, and/or unwanted wavelength bands (e.g. pump
wavelengths).

A circulator is an N-port device which routes light input
30   at port i to port (i + 1), with input to port N "wrapped

61

around" to port 1, and is often used in conjunction with
optical devices with an output emerging from the input
port (e.g. certain embodiments of optical delay lines,
dispersion compensators, and lambda routers).

5   Figures 29a and 29b-c show schematics of a BSG-based
isolator embodiment and 4-port coupled-waveguide
circulator, respectively. Both isolators and circulators
employ some means of subverting time-reversal symmetry:
i.e. light approaching the device from one direction is
10   treated differently from light approaching from the
opposite direction. This is typically achieved using
magneto-optic and/or optically active materials (such as
a Faraday rotator), in conjunction with birefringent
and/or polarizing elements.

15

Figure 29A, for example, shows an isolator in which
radiation coming in from the left passes through a
polarizer, then through a Faraday rotator that rotates
the polarization by 45 degrees, which passes through the
20   second polarizer. Radiation entering from the left is
polarized, rotated by the rotator and then blocked by the
second polarizer.

Figure 29B shows an example of a circulator, in which
25   radiation entering from the right on port 1 is rotated by
the rotator (e.g. 45 degrees), reflected back from port
3, rotated again and passes through the splitter to port
2.

Figure 29C shows an example of a rotator that may be used
with the foregoing or other apparatus. Radiation enters
from the left on the upper waveguide, is coupled to the
lower waveguide by a BSG coupler in the presences of a ,
5   Faraday material and therefore also is rotated in
polarization.

Supergratings, in accordance with the teachings of the
present invention can be combined with magneto-optic
10   materials and/or polarizing elements to produce isolators
and circulators offering wavelength-selective operation
on pre-selected channels, or over broad band(s) of
wavelengths.

15   BSG Photonic Band Gap materials

An important advance in optical theory in the past few
decades is the concept of the photonic band gap (PBG).
This realization that a two- or three-dimensional
20   periodic modulation of a material's refractive index can
create optical wavelength ranges at which no light can
propagate, regardless of direction, has proved to be
fruitful in application. Applications include micro-dot
lasers, sharp waveguide turns, high-Q optical filters,
25   and wavelength-selective optical couplers.

Nevertheless, the PBG is essentially a two- or
three-dimensional extension of the Bragg grating. The BSG
concept, as an extension of the Bragg grating into
30   wavelength space, may be combined with the PBG to create
a whole new set of optical materials.

A highly advantageous feature of BSG-PBG materials may
well be their departure from the high refractive
index contrasts required by conventional PBG
materials. Embodied as a periodic lattice of
refractive index features, conventional PBGs exhibit
different periodicity in different directions. Each
direction is therefore characterized by a different
effective Bragg grating, each in turn associated
with a particular band gap - a range of wavelengths
prohibited from propagating in that direction as a
consequence of the grating. The width of this
wavelength gap is directly proportional to the
effective grating's strength, which in turn
corresponds to the PBG's refractive index contrast.
However, to forbid propagation for a particular
wavelength for all directions, thereby forming the
"complete" bandgap which defines the PBG, all the
individual wavelength gaps must overlap at the
wavelength in question, thus, as those skilled in
the art are aware, imposing a minimum refractive
index contrast for the PBG.

Fig. 37 shows in Figure 37A a hexagonal arrangement of
dots representing regions of different refractive
index. Figure 37B shows a corresponding hexagon in
wave number space. Those skilled in the art are
aware that ordinary materials exhibiting the PBG
effect have a regular geometric arrangement that
produces an outline in wave number space. In Figure
37B, for example, the hexagonal array of dots in
Figure 37A is reflected in a hexagon in k-space. In
order to suppress radiation propagation (of a
certain wavelength represented by the dotted circle)

64

in all directions, therefore, the thickness of the
hexagon in k-space must be such that the circle
representing the relevant wavelength can be
inscribed within the band-gap hexagon. This
5   requirement imposes a requirement of unneeded band
gap suppression. For example, the regions at the
outer corners of the hexagon in Figure 37B is not
needed, since the dotted line is at the inner
corners. Similarly, the regions in the centers of
10   sides are not needed because the dotted line is at
the outer edge in that area.

Unlike conventional PBGs, the BSG is not restricted to a
periodic lattice and its implied directional variation in
15 periodicity. Instead, a two- or three-dimensional BSG can
be designed to exhibit a near-arbitrary band of effective
periodicity in any direction. This corresponds directly
to the one-dimensional BSG's control over its diffractive
spectrum This design freedom obviates the reliance on the
20 grating's refractive index contrast to thicken the
individual band gaps until they overlap. Instead, the
pattern of index change may be set geometrically to
reinforce the refractive index patterns of the band gaps
that cause overlap in the first place. Any extra
25 strength afforded by the available index contrast can
then be applied to subject more wavelengths to the PBG's
effect. Figure 38 shows in Figure 38A a non-periodic
arrangement of pixels that provide for the suppression of
transmission in a particular wavelength range in any
30 direction in a more economical use of resources. The
angular dependence of the pixel pattern is set such that
the dotted line (the same dotted line as in Figure 37) is
bounded by a smaller, uniform margin. If desired, the

margin in Figure 38 could be increased to cover a greater
wavelength range.

Thus, for a given technique of index modulation (e.g. ion
5   implantation) a BSG-PBG material can exclude a greater
wavelength range than conventional PBG materials.

In addition, the new materials according to the invention
may, in the same area, exclude radiation in a first
10   wavelength range and manipulate radiation in one or more
other wavelength ranges – e.g. exclude pump radiation
while deflecting, focusing, etc. radiation in a generated
wavelength band.

15   The dramatic reduction in the necessary refractive index
contrast offered by the BSG-PBGs synthesis may indeed
overcome a major practical challenge in PBG fabrication.
However, this reduction comes at a cost: a lower-contrast
grating also implies a longer required interaction length
20   through which the grating affects light. This is also
true for the PBG, however, and while the effect may be an
important consideration for certain applications, it may
be mitigated, overcome or even prove beneficial for many
others.

The BSG can do more than simply improve upon the
practicality of PBG implementation. For example, the BSG
enables materials exhibiting several photonic band gaps,
stemming directly from the capacity to emulate several
5   superimposed gratings which inspired our first
explorations. Such materials may be useful in a number of
applications, primarily those employing several optical
wavelengths, such as systems with separate pump and
signal wavelengths, as well as wavelength converters.
10 More generally, the BSG allows for complete control over
the optical band structure, including the width and
position of band gaps as well as the optical density of
states and the dispersion relation.

15 Figure 39 shows a cross section of a high efficiency
solar cell or other photodetector using a PBG material
according to the invention. Substrate 39-10 is a
conventional material that exhibits the photoelectric
effect, e.g. silicon. Layer 39-20 is a material that
20 ordinarily permits the propagation of light of the
relevant wavelength. According to the invention, a BSG-
PBG pattern has been impressed on the material 39-20, so
that propagation in the transverse direction indicated by
arrow 39-17 is suppressed. Radiation that would
25 otherwise propagate transversely is then scattered by the
BSG-PBG pattern and winds up preferentially scattering
with a vertical component (e.g. according to arrow 39-
15). A greater fraction of the incident radiation is
thus absorbed by the photoelectric material 39-10.

30

Figure 40 shows an array of PBG material 40-1 arranged in
a customary pattern. Two dots of the pattern, 40-2, have
been removed, establishing a pair of micro-dot lasers

67

(conventional pump radiation being omitted for clarity).
As many microdot lasers as desired may be arranged in any
desired geometrical layout.

5   Figure 41 shows a top view of a BSG-PBG material 41-5
that excludes radiation in a relevant wavelength range.
The BSg pattern does not extend to waveguide 41-10, which
therefore permits the passage of radiation in that
wavelength range. A curve having a radius of curvature
10   R, less than the conventional limit, referred to as a
reference value, has been formed in the waveguide. Those
skilled in the art are aware that a conventional material
would have an excessive amount of scattering when passing
through a curve with a radius of curvature less than the
15   reference value. The BSG-PBG material permits the
formation of the waveguide with reduced losses.

Figure 42 illustrates a pair of waveguides 42-10 and 42-
12 formed in a BSG-PBG material 42-5. As an optional
20   feature, the area 42-25 between the two waveguides has
been provided with a BSG-PBG material 42-25 that has a
longer attenuation length at the wavelength being
transmitted by waveguides 42-10 and 42-12. Thus,
coupling between the waveguides is facilitated. The
25   different material is not necessary, and the same
material could be used, with an appropriate spacing
between waveguides (or the BSG-PBG material could be
omitted between the waveguides).

30   As an additional option, the general provision of PBG
could be dispensed with and a PBG could be placed between

68

the waveguides 42-10 and 42-12. The material between the
two waveguides could be fabricated to permit coupling
between the waveguides, e.g. by structuring the PBG
pattern such that propagation parallel to the waveguides
5 is not allowed, but propagation (i.e. coupling) between
the waveguides is allowed.

The foregoing is an example of a directional PBG material
10 meaning a material having a pixel pattern that suppresses
propagation within a wavelength band in selected
directions.

Figure 43 illustrates a top view of a unit employing a
15 non-linear effect. Rectangle 43-05 represents an area
of a material that exhibits a non-linear effect and also
has been impressed with a PBG pattern that suppresses
propagation at wavelengths λ_1, λ_2 and λ_3. In the example
illustrated, λ_1 and λ_2 are pump wavelengths, propagating
20 along waveguides 43-10 and 43-15, respectively and λ_3 is
the output wavelength of the relevant non-linear
interaction, propagating along output waveguide 43-20.
The initial section of waveguide 43-20 is an optional
waveguide in this device that may be used, e.g. to supply
25 input radiation at λ_3, to which the result of the non-
linear interaction will be added.

Radiation at λ_1 and λ_2 combine in the overlap area to
generate radiation at λ_3, as is known in the art. The PBG
30 pattern outside the waveguides confines the radiation.

Within section 43-12 of waveguide 43-20, a pixel pattern
43-26 focuses the output radiation to a point as shown.
Section 43-25 of the waveguide 43-20 reflects radiation
at the output wavelength, so that it is directed as
5   required (upward in the drawing) and is not wasted. If
desired, or if required by limited resources, the PBG
pattern on the left, denoted by 43-07, could be set to
confine radiation of λ_1 and the pattern on the right,
denoted by 43-06, could be set to confine radiation of λ_2,
10   with the radiation λ_3 being confined only by the pattern
in the area 43-12. Thus, the (limited) capabilities of
the PBG pattern could be reserved for use only where
required.

15   It should be understood that the foregoing description is
only illustrative of the invention. Various alternatives
and modifications can be devised by those skilled in the
art without departing from the invention. Accordingly,
the present invention is intended to embrace all such
20   alternatives, modifications and variances, which fall
within the scope of the appended claims.

We claim:

1.   An optical device comprising at least two waveguides
in at least one propagation layer of grating material, a
first one of said waveguides adapted for transporting
input radiation from a first input port to output
radiation exiting from a first output port and a second
one of said waveguides transporting input radiation from a
second input port to output radiation exiting from a
second output port, and a one- or two- dimensional
(binary) supergrating in a modulation layer of grating
material for coupling input radiation propagating from one
of said first and second input ports along a corresponding
waveguide to the other of said first and second waveguides

2.   A device according to claim 1, in which said one- or
two- dimensional supergrating couples input radiation in
said first waveguide traveling in a first direction to
said second waveguide traveling in a second direction
substantially parallel to said first direction.

3.   A device according to claim 1, in which said one- or
two- dimensional supergrating couples input radiation in
said first waveguide travelling in a first direction to
said second waveguide, traveling in a second direction
substantially opposite to said first direction.

4.   A device according to claim 1, in which said first
and second waveguides are symmetric and said one- or two-
dimensional supergrating comprises a central portion
between said first and second waveguides having a first
pattern of high and low values of index of refraction and

first and second outer portions having a second pattern of high and low values of index of refraction having the opposite sense to said first pattern, whereby said one- or two- dimensional supergrating suppresses back reflection in said first and second waveguides.

5.   A device according to claim 1, in which said two dimensional supergrating comprises an array of controllable means, responsive to a set of control signals, for altering the modal index of refraction value in corresponding pixels in said array in at least two modes including a first mode in which said device couples input radiation in said first waveguide travelling in a first direction to said second waveguide travelling in a second direction substantially parallel to said first direction and a second mode in which said device couples input radiation in said first waveguide travelling in a first direction to said second waveguide traveling in a second direction substantially opposite to said first direction.

6.   A device according to claim 5, in which said one- or two- dimensional supergrating comprises an array of controllable means responsive to a set of control signals that are adapted to switch radiation of any of N different wavelengths between said first and second waveguides in said first and second modes in response to corresponding values of said control signal, whereby said device may be controlled to pass radiation in any one of N wavelengths from any of said input ports to any of said output ports, thereby forming a wavelength-dependent supergrating 2x2 coupler.

7.   A device according to claim 1, in which said one- or two- dimensional supergrating comprises an array of controllable means, responsive to a set of control signals, for altering the index of refraction value in corresponding pixels in said array in at least two modes including a first mode in which said device couples input radiation in said first waveguide to said second waveguide and a second mode in which said device couples input radiation in said second waveguide to said first waveguide.

8.   A device according to claim 7, in which said one- or two- dimensional supergrating comprises an array of controllable means responsive to a set of control signals that are adapted to switch radiation of any of N different wavelengths between said first and second waveguides in said first and second modes in response to corresponding values of said control signal, whereby said device may be controlled to pass radiation in any one of N wavelengths from any of said input ports to any of said output ports, thereby forming a wavelength-dependent supergrating 2x2 coupler.

9.   An NxM system for controllably directing radiation of a selected wavelength from any one of N input ports to any one of M output ports comprising a set of wavelength dependent supergrating couplers arranged to accept incoming radiation in an input wavelength range and to couple radiation entering in any of said N input ports to any of said M output ports, comprising a first row of N/2 input couplers, a final row of M/2 couplers and a set of intermediate mixing couplers that couple radiation from one or more couplers in a preceding row to one or more couplers in the next row.

10. A device according to claim 9, in which said one- or two- dimensional supergrating comprises an array of controllable means responsive to a set of control signals that are adapted to switch radiation of any of N different wavelengths between said first and second waveguides in response to corresponding values of said control signal, whereby said device may be controlled to pass radiation in any one of N wavelengths from any of said input ports to any of said output ports, thereby forming a wavelength-dependent supergrating cross-bar coupler.

11. A device for receiving optical radiation of N input wavelengths and dividing it into N physically separate channels, comprising:
an input channel, a set of wavelength dependent supergrating couplers connected in series to said input channel, each of said set of couplers being adapted to couple radiation in a radiation band from said input channel to an output channel.

12. A device according to claim 11, in which each of said couplers processes a single one of said N channels of radiation.

13. A device according to claim 11, in which at least some of said couplers process a range of channels of radiation and following couplers complete the process of separating each of said N channels.

14. A device for receiving optical radiation of N input wavelengths and dividing it into N physically. separate channels, comprising:

an input channel, a two dimensional wavelength dependent supergrating adapted for deflecting radiation of different wavelengths and directing the deflected radiation toward a set of output channels.

15. A device according to claim 14, in which the one- or two- dimensional wavelength dependent supergrating deflects radiation away from the input direction of travel at angles that depend on the wavelength and focus that radiation into a set of waveguides for each wavelength channel.

16. A device for processing optical radiation in a set of wavelengths comprising a set of waveguides having at least one input port and at least one output port, in which an input beam of radiation traveling on an input waveguide passes through at least one wavelength dependent supergrating coupler that couples a selected wavelength band in or out of the input waveguide, so that the remaining optical beam in the input waveguide has a wavelength range that has been added to or subtracted from by the selected wavelength band.

17. A device according to claim 16, in which said wavelength dependent supergrating coupler adds radiation from a second input port to said input beam.

18. A device according to claim 16, in which said wavelength dependent supergrating coupler subtracts radiation in a wavelength subtraction range from said input beam.

19. A device according to claim 16, in which at least two supergrating couplers are connected in series, with a

first supergrating coupler controlling a first wavelength
range and a second supergrating coupler controlling a
second wavelength range.

20. A device for monitoring the strength of radiation in
a waveguide comprising:

An input waveguide containing radiation in a selected
wavelength range; and
A wavelength dependent supergrating coupler intercepting
said radiation and deflecting a portion of said radiation
out of said waveguide and onto a radiation meter
responsive to the power of radiation impinging thereon,
whereby the magnitude of deflected radiation is a measure
of the magnitude of radiation traveling in the waveguide.

21. An optical device for altering the incoming power
spectrum of an incoming beam and converting said incoming
beam to an outgoing beam having an outgoing power spectrum
comprising:
A set of N controllable wavelength sensitive power removal
modules for removing a controllable amount of power in a
wavelength range from said incoming beam, whereby said
incoming power spectrum is converted to said outgoing
power spectrum by subtracting power from selected
wavelength ranges.

22. An optical amplifier comprising a gain medium for
receiving an input beam having an input power spectrum and
increasing the energy thereof, thereby forming an output
beam having an output power spectrum:
Comprising a power control unit for removing a
controllable amount of power in at least one wavelength
range from said incoming beam, whereby said input power

spectrum may be adjusted such that said output power spectrum has a desired profile.

23. An array of waveguides arranged in a grid comprising a set of input waveguides for receiving multiplexed inputs comprising at least one wavelength crossing a set of output waveguides, each of the input waveguides having a series of wavelength dependent supergrating couplers that each couple radiation of a selected output wavelength range to a corresponding output waveguide, whereby radiation entering with a number of wavelengths on input waveguides is sorted into a set of output waveguides, each carrying an output wavelength range.

24. A device according to claim 23, in which at least some of said output wavelength ranges cover a single wavelength channel.

25. An optical device for receiving an input beam having an input wavelength dependent group delay spectrum and applying a compensating group delay spectrum, thereby generating an output beam, comprising:

An input port for receiving said input beam;
at least one wavelength dependent supergrating for imposing a compensating wavelength dependent delay on radiation traveling therethrough; and
an output port.

26. A device according to claim 25, in which said input port is connected to an optical circulator that couples input radiation to a reflective supergrating that reflects back radiation into said circulator with said wavelength dependent delay impressed thereon.

27. A device according to claim 25, in which said input port is a first end of a first waveguide having a transmissive supergrating that passes radiation therethrough out a second end of said first waveguide with said wavelength dependent delay impressed thereon.

28. A device according to claim 25, in which said input port is connected to a reflective supergrating that couples input radiation in said first waveguide travelling in a first direction to a second waveguide and traveling in a second direction substantially opposite to said first direction with said wavelength dependent delay impressed thereon.

29. A device according to claim 25, in which said input port is connected to a transmissive supergrating that couples input radiation in said first waveguide traveling in a first direction to a second waveguide traveling in a second direction substantially parallel to said first direction with said wavelength dependent delay impressed thereon.

30. An optical device comprising an input port for receiving incident radiation and directing the radiation on an array of pixels comprising a supergrating, each pixel having a modal index of refraction selected from a set of index values, the array of pixels collectively processing the incident radiation and directing at least one beam of output radiation to at least one output port, in which at least some of the array of pixels are connected to control means for controllably setting the value of the modal index of refraction of the

corresponding pixels in response to a control signal, so
that the process applied to the incident radiation may be
determined by the control signals applied to the control
means.

31.   A laser comprising a gain medium, pumping means for
establishing an inversion in said gain medium and means
for resonating optical radiation in said gain medium, in
which:
said means for resonating radiation in said gain medium
comprises at least one array of pixels comprising a
supergrating, each pixel having a modal index of
refraction selected from a set of index values, the array
of pixels collectively processing the incident radiation,
in which at least some of the array of pixels are
connected to control means for controllably setting the
value of the index of refraction of the corresponding
pixels in response to a control signal, so that the
process applied to the incident radiation may be
determined by the control signals applied to the control
means.

32. A laser according to claim 31, in which said
supergrating resonates radiation in at least two
wavelength ranges with a respective loss set by said
control signals, thereby establishing a power spectrum
determined by said control signals.

33. A laser according to claim 31, in which said
supergrating is located outside said gain medium.

34. A laser according to claim 31, in which said
supergrating is located inside said gain medium.

35. A laser according to claim 31, in which said supergrating is located inside said gain medium and said supergrating directs radiation of different wavelengths along different paths through said gain medium, thereby establishing a wavelength dependent length through said resonator.

36. A device for receiving optical radiation of at least two input wavelengths on at least one physically separate channels and combining it into a single output channel, comprising:

a least two input channels;

a one- or two- dimensional wavelength dependent supergrating adapted for deflecting radiation of different wavelengths and directing the deflected radiation toward said output channel.

37. A device according to claim 36, in which the one- or two- dimensional wavelength dependent supergrating deflects radiation away from the input directions of travel at angles that depend on the wavelength and focus that radiation into a waveguide for the output wavelength channel.

38. An optical device comprising at least one input port and at least one output port connected by asymmetric optical means having different attenuation in opposite directions, further comprising a supergrating coupling radiation within a pass band from the input port to the output port.

39. A device according to claim 38, in which the supergrating couples radiation traveling in a first

direction from a first waveguide to radiation traveling in the first direction in a second waveguide.

40. A device according to claim 38, in which the supergrating couples radiation traveling in a first direction in an input waveguide to radiation traveling in a second direction opposite to the first direction in an output waveguide.

41. A device according to claim 40, in which the input waveguide and the output waveguide are the same.

42. A device according to claim 40, in which the input waveguide and the output waveguide are physically separated.

43. An optical device comprising at least one input port and at least one output port connected by asymmetric optical means having different attenuation in opposite directions, further comprising a supergrating coupling radiation within a pass band from an input port to the next port in sequence.

44. An optical device comprising an input port and an output port disposed along an optical axis and connected by a supergrating coupling radiation within a pass band from the input port to the output port, further comprising a set of lateral pixels extending in two lateral directions that represent an analog profile that forms a design set of wave fronts.

45. An optical device according to claim 45, in which a set of pixels of said supergrating are controlled by controllable means, responsive to a set of control

signals, for altering the index of refraction value in corresponding pixels in said array.

46. A three-dimensional optical device comprising at least one waveguide in a first propagation layer of grating material for transporting input radiation from a first input port to output radiation exiting from a first output port, and a two dimensional supergrating in a modulation layer of grating material for coupling input radiation propagating from said first port out of said first propagation layer to at least one other propagation layer disposed along a third dimensional axis at a different location from said first propagation layer and having quantized pixels formed therein for processing said radiation; and
means for directing processed radiation toward said first output port.

47. A material comprising a layer of optically propagating material in a reference plane that transmits radiation in a wavelength range, the material being impressed with a pattern of index of refraction change such that propagation in the reference plane is suppressed, the pattern of index of refraction change being digitized from an analog index of refraction profile.

48. A material according to claim 47, in which the pattern of index of refraction change is modified to permit propagation of radiation in the wavelength range within a restricted area and in a restricted direction.

49. A material according to claim 47, that is disposed on a substrate of photo-electric material, whereby propagation of radiation that impinges on the photo-

electric material is facilitated compared with propagation
of radiation that does not impinge on the photoelectric
material.

50. A material according to claim 47, that is capable of
laser action at a laser wavelength and has at least one
localized area permitting propagation of radiation at the
laser wavelength, whereby stimulated emission at the laser
wavelength is confined to resonate within the localized
area.

51. A material according to claim 47, that contains a
waveguide that within which the pattern of index of
refraction change is absent, such that radiation
propagates within the waveguide, in which material the
waveguide follows a curve having a radius of curvature
less than a reference value.

52. A material according to claim 47, that contains two
waveguides with a separation region therebetween, the
separation region having the ability to propagate
radiation within at least an attenuation length.

53. A material according to claim 52, in which the
separation region has a pattern of index of refraction
change that permits propagation with an attenuation length
greater than the separation between the waveguides.

54. A material according to claim 47, in which the
material supports a non-linear interaction between two
input wavelengths that generates radiation of an output
wavelength and the pattern of index of refraction change
suppresses propagation of the two input wavelengths and
the output wavelength; and

At least one waveguide is formed in the material for the propagation of the input and output wavelengths.

55. A method of forming a two dimensional supergrating
   in a modulation layer of grating material for
   converting input radiation propagating from an input
   source through a propagation layer of grating material
   to output radiation exiting from said grating on at
   least one output path comprising the steps of:

generating a two dimensional analog refractive index
profile in the modulation layer that implements a
transfer function relating electromagnetic fields
characteristic of the input radiation and output
radiation;

digitizing the analog refractive index profile to
generate an array of pixels in the modulation layer
having digitized refractive index values by using a two-
dimensional technique that conserves Fourier information
within one or more regions of the two-dimensional
spatial-frequency representation of said two-dimensional
analog refractive index profile; and

imposing the array of pixels representing the digitized
refractive index profile on the modulation layer.

56.   A method according to claim 55, further
   comprising the steps of selecting a two-dimensional
   sampling lattice of lattice pixels;

Setting a total device length and width;

In which the step of digitizing includes setting a value
for the index of refraction in each lattice pixel of
the total sampling lattice.

57.   A method according to claim 55, in which the step
of digitizing includes computing an intermediate
sampled index profile wherein the value at each sample
point of the sampled index profile is equal to the
value for the index of refraction of the analog
refractive index profile at a corresponding point on
the sampling lattice.

58. A method according to claim 55, further comprising
the steps of:

Converting the reflectance specifications of the transfer
function to the Fourier Domain;

Specifying grating parameters in the Fourier Domain; and

Converting the grating parameters to the spatial domain,
thereby determining the analog profile in the spatial
domain.

59. A method according to claim 55, further comprising
specifying phases of components of the analog
refractive index profile such that the maximum
refractive index value of the analog refractive index
profile is minimized.

60. A method of forming an effective one dimensional
supergrating in a modulation layer of grating material
for converting input radiation propagating along an

86

axis from an input source through a propagation layer
of grating material to output radiation exiting from
said grating on said axis comprising the steps of:

generating a two dimensional analog refractive index
profile in the modulation layer that implements a
transfer function relating electromagnetic fields
characteristic of the input radiation and output
radiation;

digitizing the analog refractive index profile to
generate an array of pixels in the modulation layer
having digitized refractive index values by using a two-
dimensional technique that maintains Fourier components
within one or more regions of the two-dimensional
spatial-frequency representation of said two-dimensional
analog refractive index profile; and

imposing the array of pixels representing the digitized
refractive index profile on a portion of the modulation
layer extending laterally from the axis by a lateral
distance.

61.   A method of forming a three-dimensional
supergrating in a modulation volume of grating material
for converting input radiation propagating from an input
source through the grating material to output radiation
exiting from said grating on at least one output path
comprising the steps of:

generating a three-dimensional analog refractive index
profile in the modulation volume that implements a
transfer function relating electromagnetic fields
characteristic of the input radiation and output
radiation;

digitizing the analog refractive index profile to
generate an array of pixels in the modulation layer
having digitized refractive index values by using a
three-dimensional technique that conserves Fourier
information within one or more regions of the three-
dimensional spatial-frequency representation of said two-
dimensional analog refractive index profile; and

imposing the array of pixels representing the digitized
refractive index profile on the modulation layer.

62. A method of forming a one or two or three
     dimensional supergrating in a modulation layer of
     grating material for converting input radiation
     propagating from an input source through a
     propagation layer of grating material to output
     radiation exiting from said grating on at least one
     output path comprising the steps of:

Generating a one dimensional analog refractive index
profile P in the modulation layer that implements a
transfer function relating electromagnetic fields
characteristic of the input radiation and output
radiation;

generating a filter function H that selects the spatial-
frequency ranges in which spectral information is
conserved and assigns weights thereto;

solving the optimization problem represented by

$$\min_{X,V} C = \min_{X,V} \left[\sum |H(P-X)|^L + \sum_i V_i (X_i - n_{low})(X_i - n_{high}) \right],$$

where X is a vector containing the Binary
Supergrating's refractive index values, V is a vector of
Lagrange multipliers, L determines the type of
optimization, and n_{low} and n_{high} are the Binary
Supergrating's low and high refractive index values,
respectively; thereby computing a Binary Supergrating
refractive index profile, X, in the modulation layer
that converts the input radiation to the output
radiation; and

imposing the array of pixels representing the digitized
refractive index profile on the modulation layer,
whereby the input radiation is converted to the outpt
radiation.

1/28

FIG.1

FIG.2

RIDGE WAVEGUIDE

BINARY SEQUENCE

30

31

W_1 "LOW–INDEX" WIDTH

W_2 "HIGH–INDEX" WIDTH

FIG.3

λ_S IN

40

λ_1

λ_2

λ_3

FIG.4

3/28

FIG.5

FIG.6

CA 02490768 2004-12-22

4/28

FIG.7a

FIG.7b

COUPLED WAVEGUIDES, 7c4
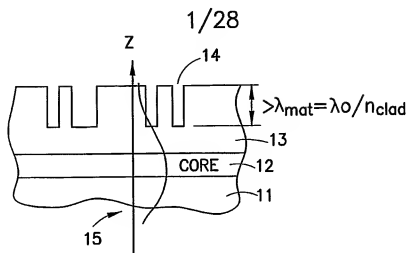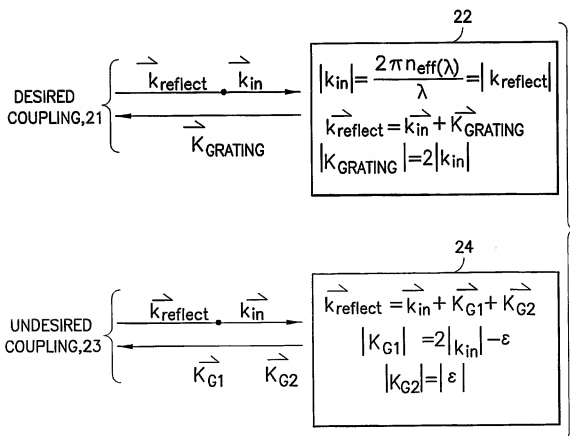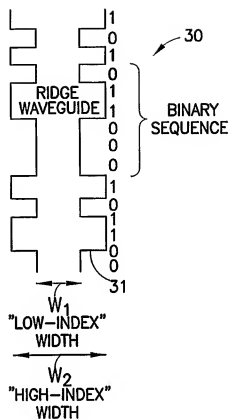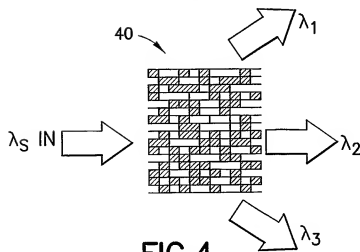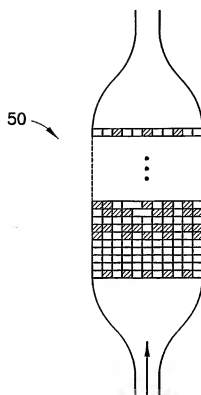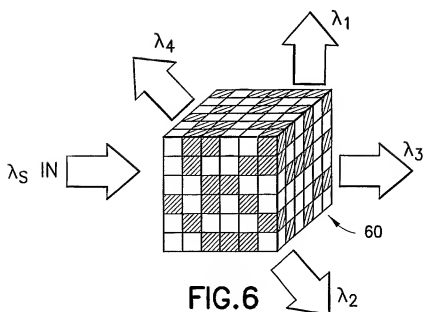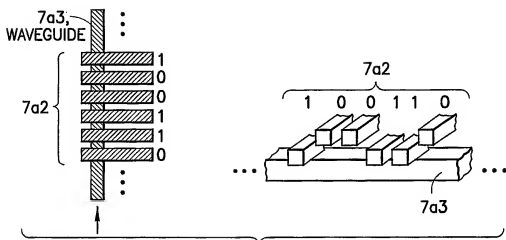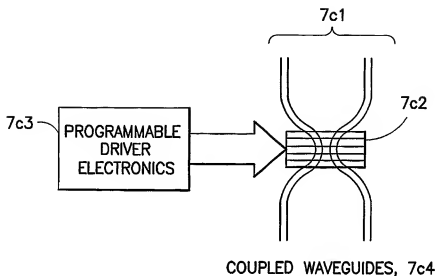
FIG.7c
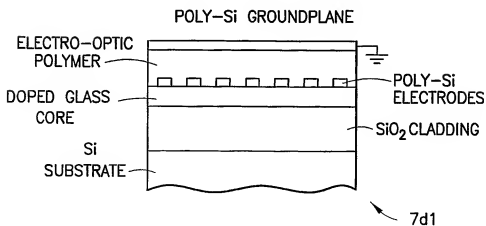
PROGRAMMABLE SUPERGRADING EMPLOYING
ELECTRO−OPTIC POLYMER

FIG.7d

6/28

λ_1 λ_2

FIG.8

$$\lambda_1 = \frac{\lambda_0}{(n_{eff})_1} \quad \lambda_2 = \frac{\lambda_0}{(n_{eff})_2}$$

ASYMMETRIC WAVEGUIDES
$$(\lambda_1 \neq \lambda_2)$$

FIG.9

WAVEGUIDE 1   WAVEGUIDE 2

FIG.10

FIG.11

FIG.12

PULSED LASER
LIGHT
WAVELENGTH
λ

13-10

13-1

FIG.13

CORE,
141

CLADDING,
142

144

143

145

MOTION RELATIVE
TO FOCUS

FIG.14

FIG.16

N WAVEGUIDES OUT

λ_1 λ_N

λ_1 λ_2 λ_N

MODE EXPANDER

160

$\lambda_1 \ldots \lambda_N$ IN

FIG.17

DROP 172

173

ADD 175

170

THROUGH 174

IN 171

FIG.15

15-3

15-1

N λ's IN

15-2

FIG.18

FIG.19

FIG.20a

FIG.20b

FIG.20c

FIG.21

INPUT

POWER–
FLATTENED
OUTPUT

FIG.22a

POWER
(dB)

λ

INPUT POWER SPECTRUM

FIG.22b

LOSS SPECTRUM
(e.g OUTCOUPLING
EFFICIENCY)

LOSS
(dB)

λ

FIG.22c

OUTPUT POWER SPECTRUM

POWER
(dB)

λ

FIG.22d

GAIN MEDIUM
BSG
23-1

FIG.23a

UNFLATTENED
GAIN COEFFICIENT
SPECTRUM

λ

SPECTRUM OF UNPERTURBED
GAIN MEDIUM

FIG. 23b

BSG LOSS
COEFFICIENT
SPECTRUM

λ

BSG LOSS COEFFICIENT
SPECTRUM
(i.e. WITH NO GAIN)

FIG. 23c

FLATTENED
GAIN COEFFICIENT
SPECTRUM

λ

COMBINED GAIN
COEFFICIENT SPECTRUM

FIG. 23d

MULTIPLEXED
INPUT

PROGRAMMABLE
BSG

FIG.24a

MULTIPLEXED
OUTPUT

LOWER WAVEGUIDE ARRAY

$\lambda_{i,j}$

$\lambda_{i,j+1}$

$\lambda_{i,j+2}$

$\lambda_{i+1,j}$

UPPER
WAVEGUIDE
ARRAY

OUTPUT
(DEMUXED)   FIG.24b

CIRCULATOR BASED DESIGN

COMPENSATOR
CIRCULATOR   WAVEGUIDES OR FIBER
INPUT

OUTPUT
BSG

FIG.25a

TRANSMISSIVE FIBER DESIGN

OPTICAL FIBER

INPUT
LIGHT
FIBER—WRITTEN
BSG

OUTPUT
LIGHT

FIG.25b

COUNTER—DIRECTIONAL COUPLED—WAVEGUIDE DESIGN

IN   WAVEGUIDE 1

OUT
WAVEGUIDE 2

FIG.25c

CO—DIRECTIONAL COUPLED—WAVEGUIDE DESIGN

IN

OUT

FIG.25d

FIG.26a

FIG.26b

CHANNEL
WAVEGUIDE

GAIN   → OUTPUT

PROGRAMMABLE
BSG

FIG.27a

PROGRAMMABLE
BSG

GAIN

FIG.27b

PATH OF
LIGHT

Θ

PROGRAMMABLE BSG
PROVIDING (λ,Θ) FEEDBACK

FIG.27c

IN → ⟶ OUTPUT GUIDE

BSG COUPLER   BSG COUPLER

ADD 1   ADD 2

FIG.28a

ADD 2

IN → ⟶ OUTPUT GUIDE

2D BSG

ADD 1

FIG.28b

OPTIONAL
POLARIZER

BSG COUPLER

OPTIONAL
POLARIZER

45°

ISOLATOR

FIG.29a

CIRCULATOR

POLARIZATION —
BASED SPLITTER

BSG COUPLER

PORT 3

PORT 2

45°

PORT 1

FIG.29b

BSG ENHANCED FARADAY ROTATOR, COUNTER—DIRECTIONAL

BSG COUPLER

FIG.29c

FIG.30

SAMPLE LENGTH

FIG.31

FIG.32

PRIOR ART

22/28

FIG.33

FIG.34

23/28

```
                    ┌─────────────────────┐
  ┌─────────┐       │ SELECT THE REFRACTIVE│─351
  │  START  │──────▶│ INDEX LEVELS FOR A DEVICE│
  └─────────┘       └─────────────────────┘
                              │
                              ▼
                    ┌─────────────────────┐
                    │   DETERMINE THE      │─352
                    │ DESIRED SAMPLE LENGTH│
                    └─────────────────────┘
                              │
                              ▼
                    ┌─────────────────────┐
                    │  SET A TOTAL DEVICE  │─353
                    │ LENGTH FOR THE GRATING│
                    └─────────────────────┘
                              │
                              ▼
                    ┌─────────────────────┐
                    │ CONVERT THE DESIRED  │─354
                    │ GRATING'S REFLECTANCE│
                    │ SPECIFICATIONS TO THE│◀──┐
                    │ FOURIER DOMAIN USING │   │
                    │ FOURIER APPROXIMATION│   │
                    └─────────────────────┘   │
                              │               │
                              ▼               │
                    ┌─────────────────────┐   │
                    │ QUANTIZE THE ANALOG  │─355│
                    │    INDEX PROFILE     │   │
                    └─────────────────────┘   │
                              │               │
                              ▼               │
                    ┌─────────────────────┐   │
                    │ DETERMINE THE BSG'S  │─356│
                    │  ACTUAL REFLECTANCE  │   │
                    └─────────────────────┘   │
                              │               │
                              ▼               │
                         ╱─────────╲  357      │
               ╱─────────┤   DOES   ├─────────╲│
  ┌─────────┐  │  DIFFERENCE BETWEEN         │ │
  │  STOP   │◀─┤  ACTUAL AND SPECIFICATION   ├─┘
  └─────────┘  │  EXCEED PREDETERMINED       │
               ╲         THRESHOLD          ╱
                ╲─────────┤    ?    ├──────╱
```

FIG.35

FIG.36b

FIG.36a

PBG LATTICE

FIG.37a

WAVELENGTH

Θ

WAVELENGTH
ENTIRELY IN GAP

BAND GAP

FIG.37b

BSG-PBG

FIG.38a

WAVELENGTH

Θ

WAVELENGTH
ENTIRELY IN GAP

BAND GAP

FIG.38b

26/28

FIG.39

FIG.40

FIG.41

FIG.42

FIG.43

FIG.44

FIG.45